



A Class of it's own...




LED Lighting

Complete Solution for

# LED LIGHTING

— LIGHT YOUR MOMENT —

 [www.teknolite.com](http://www.teknolite.com)

## PRICE LIST 2026



ENERGY  
EFFICIENT



RELIABLE  
PERFORMANCE



PREMIUM  
QUALITY



WIDE RANGE  
OF SOLUTIONS

Indoor Outdoor Architectural And Commercial **Lighting Range...**


A Class of it's own...




LED Lighting

TEKNOLITE Led Panel Lights with CCT change and dimming option are made with state of art technology. CCT and dimming can be changed by remote. Also CCT can be changed by switch.

TEKNOLITE Smart lighting are highly energy saving and based on mood lighting concept. As per mood and requirement ambience can be changed. Groups of lighting load can be made on remote as per requirements. These Smart lighting are available in Panel lights, SMD down lights, COB lights, Linear lights & Hanging lights.



ON-OFF Control



Dimming Range : 15% - 100%, No need dimmer

### BEAM ANGLES

5°

15°

24°

36°

45°

60°

WARM

NEUTRAL

COOL

COLD

2000K

2700K

3500K

4000K

5000K

6000K

6000K

6500K

8000K

## DISCOVER THE PERFECT LIGHT TEMPERATURE WITH TEKNOLITE

On order flicker-free driver available

TEKNOLITE | PHILIPS | OSRAM | FULHANI | LTE | LTECH | LiFUD



230V AC



High CRI




Dimmable







USE APP, REMOTE & SWITCH

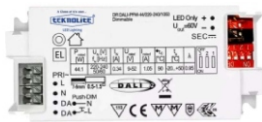

ADD AMOUNT

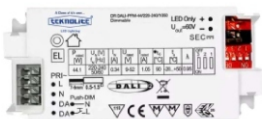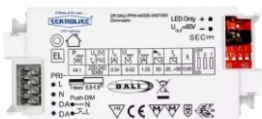

**TN-REMOTE** RF + RM3

Model	Body Colour	Group	Step	Tuning	Dimension (mm)	DLP
RM3	WB	4	WW-CW-NW-SLEEP	2700K to 6500K	130X48X20	750

**TEKNOLITE TUNEABLE & DIMEABLE DRIVER + LED**

WATTAGE	8W	12W	15W	20W	(AS PER ORDER)
ADD AMOUNT+(GST)	433	625	637	810	

**TEKNOLITE TUNEABLE & DIMMABLE DRIVER (ONLY DRIVER)**

WATTAGE	8W	12W	15W	20W	(AS PER ORDER)
DLP	674	900	1011	1123	

**CCT 3 IN 1 SWITCH OPERATE** (SWITCH & BLUETOOTH)

WATTAGE	8W	12W	20W	30W	(AS PER ORDER)
ADD AMOUNT+(GST)	97	129	216	315	

**PHASE CUT DIMMER** (AVAILABLE ON REQUEST)

WATTAGE	8W	12-15W	20-24W	30W	(AS PER ORDER)
ADD AMOUNT+(GST)	430	458	642	794	

**DALI COMPATIBLE DIMMABLE DRIVER**

WATTAGE	8W	12W	20W	30W	(AS PER ORDER)
ADD AMOUNT	ON ORDER - FULLHAM LTECH OSRAM				

**DALI TUNABLE DIMMABLE DRIVER**

WATTAGE	8W	12W	20W	30W	(AS PER ORDER)
ADD AMOUNT	ON ORDER - FULLHAM LTECH OSRAM				

**TEKNOLITE DRIVER**

WATTAGE	3-6W	8-12W	15-20W	24-30W	40-50W
DLP	130	220	324	362	674

DRIVER AVAILABLE ON ORDER: PHILIPS | FULHAM | OSRAM | COLOURS



### RDL -15

Power By : EDISON LED

Model	Watt-DC	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RDL-15	1W	130	WB-BB	65	Ø17x22	Ø15	354
RDL-15	1W	130	ROSE GOLD BLACK	65	Ø17x22	Ø15	354



### RDL -10

Working Voltage Range : 12V DC WITHOUT DRIVER PRODUCT

Model	Watt-DC	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RDL-10	1W	130	WB-BB	65	Ø17x22	Ø15	300



### ZB

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZB-3-RD	3W	390	WB	25	Ø40X30	Ø28	254



DOB

### ZD

Power By : TEEN LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZD-3-RD	3W	390	WB	25	Ø40X30	Ø28	96



### RCB

Power By : TEEN LED Teknolite Driver

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RCB-3	3W	390	WB	25	Ø41X35	Ø32	501
RCB-5	5W	650	WB	25	Ø45X38	Ø32	570



### JY

Power By : TEEN LED Teknolite Driver

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
JY-3	3W	390	WB-BB	25	Ø41X35	350
JY-3	3W	390	COPPER	25	Ø15X60X60	380



### NM-DOB

Power By : TEEN LED Teknolite Driver

MODEL	WATT	LUMENS	Body Colour	Beam Angle	Dimension (mm)	CUTOUT	DLP
Mb3	3W	390	WB	25	Ø86X75	Ø50	200
Mb3 (RGB)	3W	390	WB	25	Ø86X75	Ø50	304



### JR

Power By : TEEN LED

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
JR4	4W	520	WB	25	Ø86X75	Ø50	320
JR5	5W	650	WB	25	Ø102X80	Ø70	340
JR10	10W	1300	WB	36	Ø145X120	Ø87	720



Heavy aluminium body

## JV

Power By : Bridgelux Teknolite Driver

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP	TN DLP
Jv4	4W	520	WB-BB	24	Ø50X50	Ø42	600	
JV8	8W	1040	WB-BB	36	Ø80X70	Ø74	942	1884
JV12	12W	1560	WB-BB	36	Ø93X88	Ø82	1116	2121
JV15	15W	1950	WB-BB	36	Ø93X88	Ø82	1368	-
JV20	20W	2600	WB-BB	36	Ø105X115	Ø100	2004	2870
JV24	24W	3120	WB-BB	36	Ø105X115	Ø100	2040	-
Jv30	30W	3900	WB-BB	36	Ø105X115	Ø100	2196	-
Jv36	36W	4680	WB-BB	36	Ø105X115	Ø100	2594	-



Heavy aluminium body

## JX

Power By : Bridgelux Teknolite Driver

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP	TN DLP
Jx4	4W	520	WB-BB	36	Ø50X50	Ø42	613	-
Jx8	8W	1040	WB-BB	36	Ø80X70	Ø74	942	1884
Jx12	12W	1560	WB-BB	36	Ø93X88	Ø82	1116	2122
Jx15	15W	1950	WB-BB	36	Ø93X88	Ø82	1500	
JX20	20W	2600	WB-BB	36	Ø113X95	Ø100	2016	2870
JX24	24W	3120	WB-BB	36	Ø113X95	Ø100	2040	-
Jx30	30W	3900	WB-BB	36	Ø113X95	Ø100	2196	-
Jx36	36W	4680	WB-BB	36	Ø113X95	Ø100	2544	



## OLEE

Power By : Bridgelux

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OLEE 8	8W	1040	WB	36	Ø70X55	Ø65	1380
OLEE 12	12W	1560	WB	36	Ø80X60	Ø81	1560
OLEE 15	15W	1950	WB	36	Ø80X60	Ø81	1740



## VISCA

Power By : Bridgelux

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
VISCA8	8W	1040	WB	36	Ø72X80	Ø65	1761
VISCA12	12W	1560	WB	36	Ø84X80	Ø75	2041
VISCA15	15W	1950	WB	36	Ø84X80	Ø75	2236



## ARYA

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ARYA8	8W	1040	WB-BB-NB	45	Ø68X66	Ø60	880
ARYA12	12W	1560	WB-BB-NB	45	Ø83X75	Ø75	1135
ARYA20	20W	2600	WB-BB-NB	45	Ø93X85	Ø85	2000
ARYA24	24W	3120	WB-BB-NB	45	Ø93X85	Ø85	2394




**DOB**

**VIVA**

Power By : **TEEN** LED



Model	Watt	Lumens	Body Colour	BEAM ANGLE	Dimension (mm)	Cutout	DLP
VIVA7	7W	910	WB-NB	36	Ø85X72	Ø72	270
VIVA10	10W	1300	WB-NB	36	-	-	480

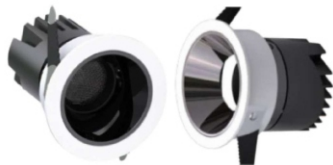

**VLP**

Power By : **TEEN** LED

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
VLP 8	8W	1040	WB-NB-BB	45	Ø86X75	Ø50	661
VLP 12	12W	1560	WB-NB-BB	45	Ø102X80	Ø70	771



**DV-(L)**

LIGHT ALUMINUM

Power By : **SUNLUX** LED **Teknolite Driver**

**\*NOT AVAILABLE IN TUNEABLE & DIMMEABLE**

LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
Dv-L7	7W	910	WB-BB	45°	Ø90x90	Ø55	660
Dv-L12	12W	1560	WB-BB	45-60°	Ø85x80	Ø75	720
Dv-L18	18W	2340	WB-BB	45-60°	Ø90x90	Ø80	973



**RC**

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RC12	12W	1560	WB	36	Ø82x68	Ø72	1360
RC20	20W	2600	WB	36	Ø106x88	Ø96	2008
RC30	30W	3900	WB	36	Ø114x100	Ø107	2592



**ES-127**

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ES127	20W	2600	WB-NB	36	Ø90X95	Ø75	2265
ES127-30	30W	3900	WB-NB	36	Ø110X105	Ø95	2824
ES127-36	36W	4680	WB-NB	36	Ø30X133	Ø115	3145
ES127D	40W	5200	WB-NB	36	170X90X95	155x75	7062
ES127D-60	60W	7800	WB-NB	36	210X110X105	192x95	8988

## TJ

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TJ 112	12W	1560	WB-NB	36	Ø60x95x95	Ø80	1139
TJ 212	24W	3120	WB-NB	36	Ø60x175x95	Ø80x160	2503
TJ 312	36W	4680	WB-NB	36	Ø60x255x95	Ø80x240	3402
TJ 112RL	12W	1560	WB NB	36	Ø55x100	Ø80	1284

## FLIX

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLIX-08	08W	910	WB-BB	36	Ø65X46	Ø55	1200
FLIX-12	12W	1560	WB-BB	36	Ø75X48	Ø65	1600
FLIX-18	18W	2340	WB-BB	36	Ø85X52	Ø75	2100

## FLIX TWIN

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLIX-T-16	08X2W	1560	WB-BB	36-45	Ø122X65	Ø113X55	2400
FLIX-T-36	18X2W	2340	WB-BB	36-45	Ø162X85	Ø153X75	3200

## VISION

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
VISION-08	08W	910	WB-BB	36	Ø43X35	Ø60	1250
VISION-12	12W	1560	WB-BB	36	Ø63X55	Ø75	1650

## VISION TWIN

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
VISION-T-16	08X2W	2080	WB-BB	36-45	Ø162X83	Ø155X75	2470

## TRUM

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TRUM-12	12W	910	WB-BB	36	Ø83X65	Ø75	1250
TRUM-18	18W	1560	WB-BB	36	Ø105X75	Ø95	1650

## TRUM TWIN

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TRUM-T-24	12X2W	3120	WB-BB	36	Ø162X83	Ø150X70	2800
TRUM-T-36	18X2W	4680	WB-BB	36	Ø210X105	Ø195X90	3700



## ZM

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZM-12	12W	1560	WB-BB	45	Ø109x95mm	Ø100	1555
ZM-20	20W	2600	WB-BB	45	Ø113x145mm	Ø136	2600
ZM-24	24W	3120	WB-BB	45	Ø130x130mm	Ø136	2600
ZM-30	30W	3900	WB-BB	45	Ø113x145mm	Ø136	2800
ZM-36	36W	4680	WB-BB	45	Ø113x145mm	Ø136	3000
ZM-50	50W	6500	WB-BB	45	Ø113x145mm	Ø136	3000

## Heavy Aluminium Die Casting



## RF

Power By : **Sunlux** LED Teknolite Driver



LED Colour : 3000K, 4000K, 5000K, 6500K

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
RF5	5W	650	WB-BB	45	Ø68X39	Ø58	468
RF8	8W	1040	WB-BB	45	Ø88X43	Ø70	600
RF12	12W	1560	WB-BB	45	Ø105X55	Ø85	996
RF20	20W	2600	WB-BB	45-60	Ø75X120	Ø105	1412
RF 24	24W	3120	WB-BB	45-60	Ø75X120	Ø105	1500
RF30	30W	3900	WB-BB	45-60	Ø90X145	Ø135	1608
RF36	36W	4680	WB-BB	45-60	Ø90X145	Ø135	1770
RF40	40W	5200	WB-BB	45-60	Ø160X160	Ø145	2100
RF50	50W	6500	WB-BB	45-60	Ø100X160	Ø145	2250

## Heavy Aluminium Die Casting



## PRISM

Power By : **Sunlux** LED Teknolite Driver



LED Colour : 3000K, 4000K, 5000K, 6500K

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
PR20	20W	2600	WB-BB	45-60	Ø90X140	Ø120	1390
PR24	24W	3120	WB-BB	45-60	Ø90X140	Ø120	1450
PR30	30W	3900	WB-BB	45-60	Ø110X165	Ø145	1570
PR36	36W	4680	WB-BB	45-60	Ø110X165	Ø145	1660
PR 40	40W	5200	WB-BB	45-60	Ø110X200	Ø175	2000
PR50	50W	6500	WB-BB	45-60	Ø110X200	Ø175	2170

## Heavy Aluminium Die Casting



## TK-MR16

Power By : **Sunlux** LED Teknolite Driver



LED Colour : 3000K, 4000K, 5000K, 6500K

MODEL	WATT	LUMENS	BODY COLOUR	BEAM ANGLE	DIMENSION (MM)	CUTOUT	DLP
MR7	7W	910	WB-BB	45-60	Ø55X50	Ø50	
MR12	12W	1560	WB-BB	45-60	Ø55X50	Ø50	
MR18	18W	2340	WB-BB	45-60	Ø85X50	Ø50	



## JCB

Power By : BRIDGELUX LED

LED Colour : 2700K, 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
JCB8	8W	1040	WB-BB	WH-GLD-NB-RG	36-45	Ø75X75	Ø65	1004
JCB12	12W	1560	WB-BB	WH-GLD-NB-RG	36-45	Ø83X83	Ø76	1120
JCB20	20W	2600	WB-BB	WH-GLD-NB-RG	36-45	Ø95X95	Ø85	1908



## TS

Power By : Sunlux LED

LED Colour : 2700K, 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TS7	7W	910	WB-BB	36	Ø40x57	Ø33	528
TS7	7W	910	RG	36	Ø40x57	Ø33	528
TS12	12W	1560	WB-BB	36	Ø59x76	Ø50	1150
TS12	12W	1560	RG	36	Ø59x76	Ø50	1200
TS20	20W	2600	WB-BB-RG	36	Ø75x95	Ø75	2100
TS24	24W	3120	WB-BB-RG	36	Ø75x95	Ø75	2600



## MV

Power By : Sunlux LED

LED Colour : 2700K, 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
MV8	8W	1040	WB-BB	WR-NB-RG	36	Ø70X56	Ø60	599
MV12	12W	1560	WB-BB	WR-NB-RG	36	Ø85X67	Ø75	749
MV20	20W	2600	WB-BB	WR-NB-RG	36	Ø95X91	Ø84	1020



## MV-SF

Power By : Sunlux LED

LED Colour : 2700K, 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
Mv8 SF	8W	1040	WB-BB	WR-NB-RG	36	Ø70X56	Ø60	660
Mv12 SF	12W	1560	WB-BB	WR-NB-RG	36	Ø85X67	Ø75	756
Mv20 SF	20W	2600	WB-BB	WR-NB-RG	36	Ø95X91	Ø84	1272



## TEERA

Power By : Sunlux LED

4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TEERA 8	8W	1040	COPPER-NB	-	40	Ø82x60	Ø73	1188
TEERA 12	12W	1560	COPPER-NB	-	40	Ø82x60	Ø73	1350
TEERA 12 -SF	12W	1560	COPPER	-	40	Ø82x60	Ø73	1350




## ES

Power By : **Bridgelux LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ES121	12W	1560	WB	36	Ø101H	Ø75X85	1380
ES120	12W	1560	WB	36	Ø101H	Ø75X85	1380

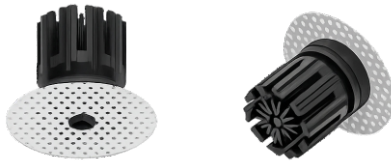

## CRISP PINHOLE

Power By : **Bridgelux LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
STE07	07W	910	WB-BB	36-45	Ø55X69		
STE12	15W	1950	WB-BB	36-45	Ø62X74		
STE18	18W	2340	WB-BB	36-45	Ø72X78		



## NOX POLO PINHOLE

Power By : **Bridgelux LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
POLO07	07W	910	WB-BB	36-45	Ø55X69	Ø55	1050
POLO10	10W	1300	WB-BB	36-45	Ø62X74	Ø65	1150
POLO12	12W	1560	WB-BB	36-45	Ø72X78	Ø75	1400
POLO15	15W	1950	WB-BB	36-45	Ø72X78	Ø95	2075



## ARENA

Power By : **Bridgelux LED**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
AR 8	8W	1040	WB-BB	36	Ø55x65	Ø55	1231
AR 12	12W	1560	WB-BB	36	Ø75x63	Ø75	1490



## AMET

Power By : **Bridgelux LED**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
AMET-8	8	1040	WB-BB	36	Ø45X65	Ø40	1400
AMET-12	12	1560	WB-BB	36	Ø50X75	Ø45	1900



## IP54

## VANS

Power By : **Bridgelux LED**

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
VANS12	12W	1560	WB-BB	WR-NB	55	Ø83x65	Ø75	1426
VANS20	20W	2600	WB-BB	WR-NB	55	Ø103x70	Ø95	1892
VANS30	30W	3900	WB-BB	WR-NB	55	Ø132x75	Ø120-125	2721



## RANZO

Power By : **Bridgelux LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RANZO-08	08W	1040	WB-RG	36-45	Ø43X35	Ø60	1720
RANZO-12	12W	1560	WB-RG	36-45	Ø63X55	Ø70	2600
RANZO-20	20W	2600	WB-RG	36-45	Ø63X55	Ø85	4160



## RIO

Power By : **Bridgelux LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RIO-08	08W	1040	WB-RG	36-45	Ø43X35	Ø60	1800
RIO-12	12W	1560	WB-RG	36-45	Ø63X55	Ø70	2600
RIO-20	20W	2600	WB-RG	36-45	Ø63X55	Ø85	4150



## LUCENTIS

Power By : **Bridgelux LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ORONIS07	07W	910	WB-BB	36-45	Ø43X35	Ø55	1720
ORONIS12	12W	1560	WB-BB	36-45	Ø63X55	Ø65	2600
ORONIS18	18W	2340	WB-BB	36-45	Ø63X55	Ø75	4160




## ORONIS

Power By : **Bridgelux LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ORONIS07	07W	910	WB-BB	36-45	Ø43X35	Ø55	1920
ORONIS12	12W	1560	WB-BB	36-45	Ø63X55	Ø65	3520

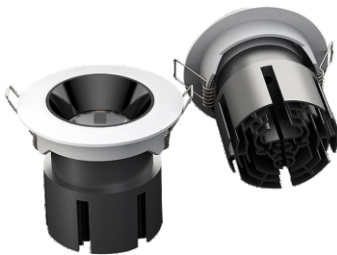

## TZF

Power By : **Bridgelux LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TZF8	8W	1040	WB-NB	36	Ø60X60	Ø60	1602
TZF 12	12W	1560	WB-NB	36	Ø86X75	Ø75	1972
TZF 20	20W	2600	WB-NB	36	Ø100X90	Ø90	2671



## GLAZE



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLAZE7	8W	1040	WB-BB-NB	45	Ø65X60	Ø55	795
GLAZE12	12W	1560	WB-BB-NB	45	Ø85X64	Ø75	990
GLAZE18	20W	2600	WB-BB-NB	45	Ø105X72	Ø95	1940
GLAZE24	24W	3120	WB-BB-NB	45	Ø130X73	Ø115	2600
GLAZE30	30W	3900	WB-BB-NB	45	Ø170X85	Ø145	4200

A Class of it's own...



Smart Lighting

# PREMIUM GALAXY SERIES

---



Matte -Black



Matte -White



Shinny Black



Chrome



Rose - gold



Bright White



Bright Black





## GALAXY

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GALAXY07	12W	1560	WB-BB	36	Ø84X80	Ø55	1150
GALAXY18	18W	2340	WB-BB	36	Ø84X80	Ø75	1350
GALAXY24	24W	3120	WB-BB	36	Ø84X80	Ø95	2200



## GALAXY IP65

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GALAXY07	12W	1560	WB-BB	36	Ø84X80	Ø55	1300
GALAXY18	18W	2340	WB-BB	36	Ø84X80	Ø75	1500
GALAXY24	24W	3120	WB-BB	36	Ø84X80	Ø95	2350



## MLE

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
MLE8	8W	1040	WB-NB	36	Ø60X73	Ø50	1844
MLE 12	12W	1560	WB-NB	36	Ø86X104	Ø75	2150
MLE 15	15W	1950	WB-NB	36	Ø86X104	Ø75	2600
MLE 20	20W	2600	WB-NB	36	Ø105X119	Ø95	3250
MLE 20	24W	3120	WB-NB	36	Ø105X119	Ø95	3750



## TEEZA

Power By : **Bridgelux** LED



LED Colour : 3000K, 4000K, 5000K, 6000K

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
TEEZA8	8W	1040	WB-BB	WR-NB	38	Ø45x53	Ø61	1814
TEEZA12	12W	1560	WB-BB	WR-NB	38	Ø55x63	Ø71	2300
TEEZA20	20W	2600	WB-BB	WR-NB	38	Ø65x73	Ø71	2857



## TISCA

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TISCA9	09W	1170	WB-BB	36-45	Ø60X56	Ø55	1700
TISCA12	12W	1560	WB-BB	36-45	Ø80X56	Ø75	1900

A Class of it's own...



LED Lighting

PREMIUM

# Zeno

SERIES



24°



36°



60°



PREMIUM  
FINISH



DURABLE  
BUILD



IP65  
RATING



EASY  
INSTALLATION

## ZENO

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ZENO-7	07W	910	WB	36	Ø84X80	Ø40	1500
ZENO-12	12W	1560	WB	36	Ø84X80	Ø40	1900
ZENO-18	18W	2340	WB	36	Ø84X80	Ø50	2600

## SHYNE COB

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
SHYNE07	07W	910	WB-BB	36-45	Ø84X80	Ø75	1050
SHYNE12	12W	1560	WB-BB	36-45	Ø84X80	Ø95	1675
SHYNE18	18W	2340	WB-BB	36-45	Ø84X80	Ø115	2650

## RETRO

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RETRO-7	07W	910	WB-BB	36-45	Ø84X80	Ø55	775
RETRO-12	12W	1560	WB-BB	36-45	Ø84X80	Ø75	1150

## SPLASH IP65

Power By : **Bridgelux LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
SPLASH12	12W	1560	WB-BB	36-45	Ø84X80	Ø75	1050
SPLASH18	18W	2340	WB-BB	36-45	Ø84X80	Ø95	1675
SPLASH24	24W	3120	WB-BB	36-45	Ø84X80	Ø115	2650

## COMPACT

Power By : **Bridgelux LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
COMPACT12	12W	1560	WB-BB	36-45	Ø84X80	Ø75	1050

## RL-H TRIMLESS

Power By : **Bridgelux LED**

LED Colour : 3000K, 4000K, 5000K, 6000K



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RL-H 12	12W	1560	WB-NB	36	Ø82x83	Ø82	1443
RL-H 15	15W	1950	WB-NB	36	Ø82x83	Ø82	2407

## RL

Power By : **Bridgelux LED**

LED Colour : 3000K, 4000K, 5000K, 6000K



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RL 12	12W	1560	WB-BB	36	Ø73x90	Ø73	1072
RL 20	20W	2600	WB-BB	36	Ø84x110	Ø84	1610

## CB IP 54

Power By : **Bridgelux LED**

LED Colour : 3000K, 4000K, 5000K, 6000K



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CB 8	8W	1040	WB-BB	36	Ø62x56	Ø55	1219
CB 12	12W	1560	WB-BB	36	Ø83x63	Ø75	1476

## LEESO

Power By : **Bridgelux LED**

LED Colour : 3000K, 4000K, 5000K, 6000K



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LEESO7	7W	910	WB-BB	24	Ø 62X82	Ø55	999
LEESO12	12W	1560	WB-BB	36	Ø 72X82	Ø65	1270
LEESO18	18W	2340	WB-BB	36	Ø 82X82	Ø75	2000

# PREMIUM URANUS COB

A Class of It's own...



Smart Lighting

## GLAMOUR MIRROR LIGHT




## GLAMOUR MIRROR LIGHT

Elegant. Natural. Flawless.




### ADVANCED COB TECHNOLOGY

Engineered with high-performance COB LED and optimized thermal design for longer life, higher efficiency and superior performance.




Thermal Conductivity



Thermal Conductivity



Thermal Conductivity



Thermal Air Convection

### OPTICAL CONCEPT




Beauty mirror light: The color is accurate and transparent, and the makeup will not go wrong.  
CRI: RA98  
IES: Rf68, Rg102



Ordinary mirror headlight: The color is dim, and there are shadows on the side face and bottom.


CRI: RA80

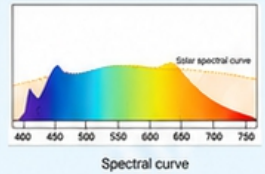

### POLARIZED LENS

Polarized lenses can effectively filter out stray light, reduce glare, improve visual comfort, optimize light distribution, and make lighting more efficient and natural.

### OPTICAL DESIGN FOR PERFECT LIGHTING

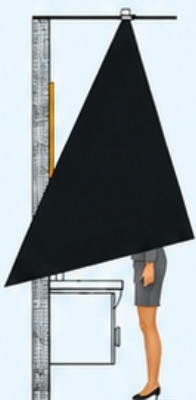

Ordinary mirror lights: direct light, no fill light, create double shadows on the face, the closer the person is to the mirror, the light will be blocked by the head, and the



Beauty mirror light: The light is reflected by the mirror, which effectively eliminates shadows on the face and makes the face softer.

70% of the light is reflected by the mirror and shines on the face.  
30% of the light is directed onto the facial contours.



Patented optical design. The closer you are to the mirror, the more light your face will receive.

### SPECIFICATIONS

Model	Uranus COB
Power	7W / 12W
Input Voltage	AC 220-240V~ 50/60Hz
LED Type	COB
CCT	3000K / 4000K / 6000K
CRI	RA98
Beam Angle	110°
Lumen Output	7W: 700lm 12W: 1200lm
Cutout	Ø75mm
Dimensions	Ø85 x H50mm
Finish	White
Housing Material	Aluminum
IP Rating	IP44 (Front)
Application	Bathroom Mirror, Vanity, Make-up Room, Dressing Area



High CRI  
RA98



Flicker Free



Eye Comfort



Long Life  
30,000 Hrs.



IP44  
Moisture Resistant



## URANUS

Power By : Bridgelux **LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
URANUS12	12W	1560	WB-BB	36-45	Ø84X80	Ø75	5175



## ELUX DOWNLIGHT

Power By : Bridgelux **LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ELUX-08	8W	910	WB-BB	36-45	Ø55X69	Ø75	1250
ELUX-15	15W	1950	WB-BB	36-45	Ø62X74	Ø95	1825



## TIMA

Power By : Bridgelux **LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
TIMA07	07W	910	WB-BB	36-45	Ø55X69	Ø75	1536
TIMA12	12W	1560	WB-BB	36-45	Ø62X74	Ø75	2000
TIMA18	18W	2340	WB-BB	36-45	Ø72X78	Ø75	2445



## OLIVE

Power By : Bridgelux **LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
OLIVE-07	07W	1560	WB-BB	36-45	Ø43X35	Ø75	1440
OLIVE-12	12W	1560	WB-BB	36-45	Ø63X55	Ø75	2000
OLIVE-18	18W	2340	WB-BB	36-45	Ø81X75	Ø75	3040



## ESTRO

Power By : Bridgelux **LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ESTRO-05	05W	650	WB-BB	36-45	Ø80X35	Ø30	1920
ESTRO-10	10W	1300	WB-BB	36-45	Ø96X45	Ø40	2560



## PENCIL

Power By : Bridgelux **LED**



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PC5	5W	650	WB-NB	36	Ø35X90	Ø30	1793
PC10	10W	1300	WB-NB	36	Ø44X100	Ø40	2334
PC-5 TILT	5W	650	WB-NB	36	Ø35X90	Ø30	1993
PC-10 TILT	10W	1300	WB-NB	36	Ø44X100	Ø40	2534



## ANOX

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
NOX07	07W	910	WB-BB	36-45	Ø55X69	Ø35	1550
NOX12	12W	1560	WB-BB	36-45	Ø62X74	Ø45	1900
NOX18	18W	2340	WB-BB	36-45	Ø72X78	Ø55	2700



## ANOX-TRIMLESS

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
NOXTR07	07W	910	WB-BB	36	Ø55X69	Ø35	1700
NOXTR12	12W	1560	WB-BB	36	Ø62X74	Ø45	2150
NOXTR18	18W	2340	WB-BB	36	Ø72X78	Ø55	2850



## ASTERO

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTERO07	07W	910	WB-BB	36-45	Ø55X69	Ø35	1625
ASTERO12	12W	1560	WB-BB	36-45	Ø62X74	Ø45	2025
ASTERO18	18W	2340	WB-BB	36-45	Ø72X78	Ø55	2750



## ASTERO TRIMLESS

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTEROTR07	07W	910	WB-BB	36-45	Ø55X69	Ø35	1900
ASTEROTR12	12W	1560	WB-BB	36-45	Ø62X74	Ø45	2300
ASTEROTR18	18W	2340	WB-BB	36-45	Ø72X78	Ø55	3050



## ASTERO PINHOLE

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASETEROUS07	07W	910	WB-BB	36-45	Ø55X69	Ø35	1850
ASETEROUS12	12W	1560	WB-BB	36-45	Ø62X74	Ø45	2300
ASETEROUS18	18W	2340	WB-BB	36-45	Ø72X78	Ø55	2875



## ASTERO ULTRA SLIM TRIMLESS

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASETEROUST07	07W	910	WB-BB	36-45	Ø55X69	Ø35	2125
ASETEROUST12	12W	1560	WB-BB	36-45	Ø62X74	Ø45	2600
ASETEROUST18	18W	2340	WB-BB	36-45	Ø72X78	Ø55	3175

# OZONE

## PREMIUM COB

Precision Light. Premium Performance.



### TRIM OPTIONS



Round Trim  
(White)



Round Trim  
(Black)



Trimless  
(White)




Trimless  
(Black)



#### PREMIUM COB LED

High efficiency with superior light output and color accuracy.



#### SUPERIOR HEAT DISSIPATION

Advanced aluminum heat sink ensures long life and stability.



#### EASY INSTALLATION

Tool-free installation with secure spring mechanism.



#### BUILT TO LAST



High quality materials for durability, reliability and long-term use.



#### VISUAL COMFORT

Low glare and flicker-free performance for a pleasant lighting experience.

### DIMENSIONS

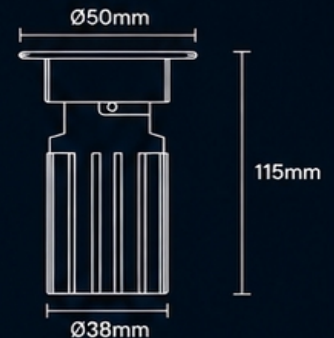

#### ARCHITECTURAL GRADE FINISH

Designed to blend elegance with performance.



#### ENERGY EFFICIENT

Maximum light output with minimal energy use.



#### PERFECT FOR EVERY SPACE

Ideal for galleries, retail, hospitality, and modern interiors.



#### PREMIUM QUALITY

Meticulously crafted to deliver a superior lighting experience.

SHAPE LIGHT. ELEVATE SPACES.

Precision • Performance • Perfection



## OZONE FIX

Power By : Bridgelux



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ELVIT10	10W	1300	WB-BB	36-45	Ø55X69	Ø40	1275
ELVIT15	15W	1950	WB-BB	36-45	Ø62X74	Ø40	1625
ELVIT20	20W	2600	WB-BB	36-45	Ø72X78	Ø50	1975



## OZONE MOVABLE

Power By : Bridgelux



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ELVIT10	10W	1300	WB-BB	36-45	Ø55X69	Ø40	1850
ELVIT15	15W	1950	WB-BB	36-45	Ø62X74	Ø40	2300
ELVIT20	20W	2600	WB-BB	36-45	Ø72X78	Ø50	2775
ELVIT25	25W	3250	WB-BB	36-45	Ø62X74	Ø40	3125
ELVIT30	30W	3900	WB-BB	36-45	Ø72X78	Ø50	3750



## OZONE TRIMLESS

Power By : Bridgelux



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ELVIT10	10W	1300	WB-BB	36-45	Ø55X69	Ø40	1850
ELVIT15	15W	1950	WB-BB	36-45	Ø62X74	Ø40	2300
ELVIT20	20W	2600	WB-BB	36-45	Ø72X78	Ø50	2775
ELVIT25	25W	3250	WB-BB	36-45	Ø62X74	Ø40	3125
ELVIT30	30W	3900	WB-BB	36-45	Ø72X78	Ø50	3750



## PLUTO ULTRA SLIM COB

Power By : Bridgelux



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PLUTO03	07W	910	WB-BB	36-45	Ø55X69	Ø35	1900
PLUTO05	12W	1560	WB-BB	36-45	Ø62X74	Ø45	2300
PLUTO07	18W	2340	WB-BB	36-45	Ø72X78	Ø55	3050
PLUTO12	07W	910	WB-BB	36-45	Ø55X69	Ø35	1900
PLUTO15	12W	1560	WB-BB	36-45	Ø62X74	Ø45	2300
PLUTO18	18W	2340	WB-BB	36-45	Ø72X78	Ø55	3050



## STELLAR PINHOLE

Power By : Bridgelux



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
STE07	07W	910	WB-BB	36-45	Ø55X69	Ø30	1275
STE12	15W	1950	WB-BB	36-45	Ø62X74	Ø40	1725
STE18	18W	2340	WB-BB	36-45	Ø62X74	Ø50	2075

A Class of it's own...



Smart Lighting

# CLUB SERIES

A Class of it's own...



## ASSEMBLY DIAGRAM

FESSIONAL DESIGN | HIGH QUALITY



AVAILABLE IN 8 REFLECTOR  
OPTIONS HONEYCOMB AVAILABLE



ELLIPTSES RING



PIN HOLE



MATT WHITE



CHROME



MATT BLACK



GUN BLACK



GOLD



FOG SILVER



### CLUB TALL

Power By : Bridgelux **LED**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T12	12W	1560	WB-BB	36-45	Ø88x114	Ø55	2050
CLUB-T18	18W	2340	WB-BB	36-45	Ø108x147	Ø75	2450
CLUB-T24	24W	3120	WB-BB	36-45	Ø108x147	Ø75	3050



### CLUB TALL TRIMLESS

Power By : Bridgelux **LED**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-TR-12	12W	1560	WB-BB	36-45	Ø88x114	Ø55	2150
CLUB-T-TR-18	18W	2340	WB-BB	36-45	Ø108x147	Ø75	2550
CLUB-T-TR-24	24W	3120	WB-BB	36-45	Ø108x147	Ø75	3150



### CLUB TALL SQUARE

Power By : Bridgelux **LED**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-SQ-12	12W	1560	WB-BB	36-45	Ø88x114	Ø55	2050
CLUB-T-SQ-18	18W	2340	WB-BB	36-45	Ø108x147	Ø75	2450
CLUB-T-SQ-24	24W	3120	WB-BB	36-45	Ø108x147	Ø75	3050



### CLUB TALL SQ TRIMLESS

Power By : Bridgelux **LED**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-SQ-TR-12	12W	1560	WB-BB	36-45	Ø88x114	Ø55	2150
CLUB-T-SQ-TR-18	18W	2340	WB-BB	36-45	Ø108x147	Ø75	2550
CLUB-T-SQ-TR-24	24W	3120	WB-BB	36-45	Ø108x147	Ø75	3150



### CLUB TALL DOUBLE SQUARE

Power By : Bridgelux **LED**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-DSQ-24	12X2W	3120	WB-BB	36-45	Ø88x114	Ø55	4100
CLUB-T-DSQ-36	18X2W	4680	WB-BB	36-45	Ø108x147	Ø75	4900



### CLUB TALL DOUBLE SQ TRIMLESS

Power By : Bridgelux **LED**

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-T-DSQ-TR-24	12X2W	3120	WB-BB	36-45	Ø88x114	Ø55	4300
CLUB-T-DSQ-TR-36	18X2W	4680	WB-BB	36-45	Ø108x147	Ø75	5100

# GLANZA

## PREMIUM SERIES

*Illuminate Every Detail*

A Class of it's own...

**TEKNOLITE**®

LED Lighting

### REFLECTOR OPTIONS



PREMIUM  
QUALITY



HIGH LUMEN  
OUTPUT



MULTIPLE  
FINISHES



DURABLE &  
RELIABLE



ENERGY  
EFFICIENT

### GLARE CONTROL ACCESSORIES



### DOWNLIGHT OPTIONS



FOG SILVER



CHROME



GUN BLACK



MATT BLACK



GOLD



MATT WHITE



MATT BLACK



GUN BLACK



GOLD



CHROME



MATT WHITE



FOG SILVER

### CURVE ROUND




### CURVE SQUARE



### SQUARE TRIMLESS OPTIONS



MATT BLACK



GOLD

### DUAL MODULE OPTIONS



TRIMLESS  
DESIGN FOR  
SEAMLESS  
INTEGRATION

FLEXIBLE  
CONFIGURATIONS  
FOR EVERY  
SPACE



EASY  
INSTALLATION



EFFICIENT  
HEAT DISSIPATION



LONG LIFE  
PERFORMANCE



IDEAL FOR  
COMMERCIAL & RESIDENTIAL

*Premium Lighting. Timeless Elegance.*



## GLANZA

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-07	07W	1560	WB-BB	36-45	Ø 78X65	Ø55	1275
GLZ-12	12W	1560	WB-BB	36-45	Ø96X85	Ø55	1400
GLZ-18	18W	2340	WB-BB	36-45	Ø 121X105	Ø75	1850
GLZ-T24	24W	3120	WB-BB	36-45	Ø 121X105	Ø95	2775



## GLANZA TRIMLESS

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-TR-07	07W	1560	WB-BB	36-45	Ø 78X88	Ø55	1425
GLZ-TR-12	12W	1560	WB-BB	36-45	Ø96X108	Ø55	1550
GLZ-TR-18	18W	2340	WB-BB	36-45	Ø 110X128	Ø75	2150
GLZ-TR-24	24W	3120	WB-BB	36-45	Ø 110X128	Ø95	2975



## GLANZA SQUARE

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-SQ-12	12W	1560	WB-BB	36-45	Ø96X85	Ø55	1500
GLZ-SQ-18	18W	2340	WB-BB	36-45	Ø 121X105	Ø75	1950
GLZ-SQ-24	24W	3120	WB-BB	36-45	Ø 121X105	Ø95	2875



## GLANZA SQUARE TRIMLESS

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-SQ-TR-12	12W	1560	WB-BB	36-45	Ø 85X53	Ø55	1550
GLZ-SQ-TR-18	18W	2340	WB-BB	36-45	Ø111X74	Ø75	2150
GLZ-SQ-TR-24	24W	3120	WB-BB	36-45	Ø 124X94	Ø95	2975



## GLANZA DOUBLE SQUARE

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-DSQ-TR-12	12W	1560	WB-BB	36-45	Ø88x114	Ø55	3000
GLZ-DSQ-TR-18	18W	2340	WB-BB	36-45	Ø108x147	Ø75	3850
GLZ-DSQ-TR-24	24W	3120	WB-BB	36-45	Ø108x147	Ø95	5650



## GLANZA DOUBLE SQUARE TRIMLESS

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GLZ-DSQ-TR-12	12X2W	3120	WB-BB	36-45	Ø88x114	Ø55	3200
GLZ-DSQ-TR-18	18X2W	4680	WB-BB	36-45	Ø108x147	Ø75	4050



## CURVE ROUND

Power By : **Bridgelux** LED LED Colour : 3000K, 4000K, 5000K, 6000K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-R-07	7W	910	WB-NB	36-45	Ø65x75	Ø55	1476
CLUB-CURVE-R-12	12W	1560	WB-NB	36-45	Ø82x81	Ø75	1861



## CURVE ROUND TRIMLESS

Bridgelux LED LED Colour : 3000K, 4000K, 5000K, 6000K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-RT-07	7W	910	WB-NB	36-45	Ø88x75	Ø55	2118
CLUB-CURVE-RT-12	12W	1560	WB-NB	36-45	Ø108x81	Ø75	4005



## CURVE SQUARE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-S-07	7W	910	WB-BB	36-45	Ø88x114	Ø55	2300
CLUB-CURVE-S-12	12W	1560	WB-BB	36-45	Ø108x147	Ø75	2600



## CURVE SQUARE TRIMLESS

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB CURVE-ST-07	7W	910	WB-BB	36-45	Ø88x114	Ø55	2450
CLUB CURVE-ST-12	12W	1560	WB-BB	36-45	Ø108x147	Ø75	2750



## CURVE DOUBLE SQUARE

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB CURVE-DS-14	7X2W	1820	WB-BB	36-45	Ø88x114	Ø55	5100



## CURVE DOUBLE SQUARE TRIMLESS

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CLUB-CURVE-DT-14	7X2W	1820	WB-BB	36-45	Ø88x114	Ø55	5500



## FLARE

Power By : **Bridgelux** LED LED Colour : 3000K, 4000K, 5000K, 6000K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-12	12W	1560	WB-NB	24-36	53X66	Ø45	1750



## FLARE TRIMLESS

Power By : **Bridgelux** LED LED Colour : 3000K, 4000K, 5000K, 6000K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-T-12	12W	1560	WB-NB	24-36	70X66	Ø42	1900



## FLARE PINHOLE

Power By : **Bridgelux** LED LED Colour : 3000K, 4000K, 5000K, 6000K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-P-12	12W	1560	WB-NB	24	53X66	Ø45	1850



## FLARE TILTABLE

Power By : **Bridgelux** LED LED Colour : 3000K, 4000K, 5000K, 6000K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-T-12	12W	1560	WB-NB	24-36	70X66	Ø42	1850



## FLARE-TILTABLE TRIMLESS

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-T-12	12W	1560	WB-NB	24-36	80X66	Ø50	2125



## FLARE-TILTABLE PINHOLE

Power By : **Bridgelux** LED  
 LED Colour : 3000K, 4000K, 5000K, 6000K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
FLARE-TP-12	12W	1560	WB-NB	24	63X66	Ø55	1975

A Class of it's own...



LED Lighting

# LASER RECESSED LINEAR PINHOLE

PRECISION LIGHTING. ELEVATED SPACES.



PRECISE  
LIGHT CONTROL



LOW GLARE  
COMFORT



EASY  
INSTALLATION



PREMIUM  
QUALITY



## AVAILABLE MODELS



**RZRP 210**  
10W | 10 Lens



**RZRP 110**  
10W | 5 Lens



**RZRP 84**  
8W | 4 Lens




**RZRP 42**  
6W | 2 Lens



**RZRP 96**  
18W | 9 Lens



**RZRP 64**  
12W | 4 Lens



**RZRP EB**  
End Cap



Lamp can be customized  
in different colors



Strong  
electroplate  
spring

## IDEAL FOR



OFFICE



HOME



SHOWROOM



STUDIO



INTERIORS

## RZR-PINHOLE

Power By : **SUNLUX** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RZR-P-4	04W	520	WB-BB	36-45	Ø105X76	Ø46	1150
RZR-P-6	06W	780	WB-BB	36-45	Ø165X76	Ø46	1475
RZR-P-12	12W	1560	WB-BB	36-45	Ø315X76	Ø46	1950
RZR-P-SQ-12	12W	1560	WB-BB	36-45	Ø315X76	Ø46	1950
RZR-P-RD-6	06W	780	WB-BB	36-45	Ø315X76	Ø46	1475

## RZR TILTABLE

Power By : **SUNLUX** LED



LED Colour : 3000K, 4000K, 5000K, 6500K



Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
RZR-6TILT	6W	780	WB-BB	Black	36	84X49X44	78X43	1088
RZR-12TILT	12W	1560	WB-BB	Black	36	144x49x44	136X43	1761
RZR-24TILT	12Wx2	3120	WB-BB	Black	36	255X49X44	250X43	2980

## LINEA-SLEEK

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LINEA06	06W	780	WB-BB	36-45	Ø122X15	Ø75	1350
LINEA12	12W	1560	WB-BB	36-45	Ø236X15	Ø95	2750

## RZR

Power By : **EDISON**



LED Colour : 3000K, 4000K, 6500K



Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RZR-3-6	6W	780	WB-BB	BB-WH-NB-RG	36	68x30x36	61x23	756
RZR-6-12	12W	1560	WB-BB	BB-WH-NB-RG	36	124x30x36	117x23	1134
RZR-9-18	18W	2340	WB-BB	BB-WH-NB-RG	36	—	—	1960

## ELY

Power By : **SUNLUX** LED



LED Colour : 3000K, 4000K, 5000K, 6500K



Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ELY8	8W	1040	WB-BB	Black	24	40x50x30	40x50	1380
ELY308	24W	3120	WB-BB	Black	24	90x50x30	40x85	2350
ELY608	48W	6240	WB-BB	Black	24	50x138x30	40x124	4200

## ASTRA

Power By : **SUNLUX** LED



LED Colour : 3000K, 4000K, 5000K, 6500K



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ASTRA-06	06W	780	WB-BB	36-45	Ø105X76	Ø46	3300
ASTRA-12	12W	1560	WB-BB	36-45	Ø165X76	Ø46	5600
ASTRA-22	18W	2340	WB-BB	36-45	Ø315X76	Ø46	9000



## CUBIX-TRIMLESS

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CUBIX-T-06	06W	780	WB-BB	36-45	Ø122X15	Ø75	1650
CUBIX-T-12	12W	1560	WB-BB	36-45	Ø126X40	Ø31	3250
CUBIX-T-20	20W	2600	WB-BB	36-45			4250



## DOUBLE & TRIPLE GIMBAL

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
GBL2-20	2X20W	5200	WB-BB	45	Ø259x125x100	Ø238x125	4108
GBL2-30	2X30W	7800	WB-BB	45	Ø259x125x100	Ø238x125	4722
GBL3-60	3X20W	7800	WB-BB	45	Ø374X125X100	Ø353x125	5500
GBL 60	3X20W	7800	WB-BB	45	Ø374X125X100	Ø353x125	7832



## ES

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
ES 7	7W	910	WB-BB	45	Ø65x65x52mm	Ø54x54	1090
ES 14	7x2 W	1820	WB-BB	45	Ø65x126x52mm	Ø54x114	2000
ES 21	7x3 W	2730	WB-BB	45	Ø65x186x52mm	Ø54x175	2950
ES 28	7x4 W	3640	WB-BB	45	Ø126x126x52mm	Ø115x115	3750



## STROKE

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	CUTOUT	DLP
ES 6	6	780	WB-BB	45	Ø102X41	95X35	1375
ES12	12	1560	WB-BB	45	Ø162X41	120X35	2000



## HELIX-SF

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
HELIX-10	10	1300	WB-BB	45	Ø140X32X56	1575
HELIX-20	20	2600	WB-BB	45	Ø280X32X56	2400

# LUME

A Class of it's own...



Smart Lighting





## ANTI GLARE RECESSED MOUNTED LED LIGHT

SEE MORE • FEEL BETTER • LIVE BETTER



Available in  
**7W 14W 21W 28W**

### PRODUCT DIMENSIONS

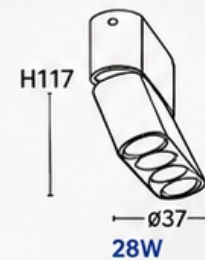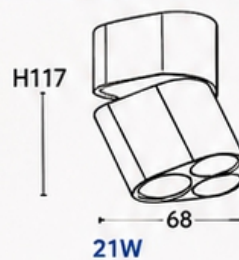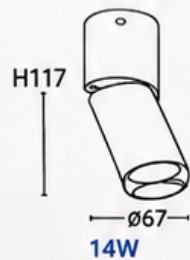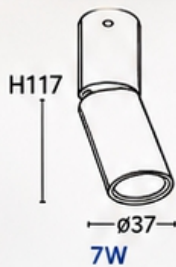

SOFT LIGHTING. STRONG PERFORMANCE. SMART CHOICE.



**ANTI GLARE**

Comfortable  
Lighting



**RECESSED  
MOUNTED**

Seamless &  
Stylish Look



**ENERGY  
EFFICIENT**

Save More  
Energy



**DURABLE &  
RELIABLE**

Built  
To Last



**SMART  
DESIGN**

Modern | Minimal  
Functional



**PERFECT FOR  
EVERY SPACE**

Home | Office  
Retail | Hospitality



High  
Performance LED



Elegant &  
Minimal Design



Easy  
Installation



Long  
Life



Low  
Maintenance



## LUME

Power By : **Bridgelux** <sup>LED</sup>

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LUME10	10W	1300	METAL GREY	36	Ø47X37X117	Ø54x54	1650
LUME15	15W	1950	METAL GREY	36	Ø67X37X117	Ø54x114	2000
LUME20	20W	2600	METAL GREY	36	Ø67X63X117	Ø54x175	2950
LUME36	36W	4680	METAL GREY	36	Ø187X63X117	Ø115x115	3800



## LAVIA

Power By : **Bridgelux** <sup>LED</sup>

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LAVIA-9	9W	1170	METAL GREY	36	Ø102X62X55	Ø55	1850
LAVIA-15	15W	1950	METAL GREY	36	Ø102X82X75	Ø75	2400
LAVIA-9	9W	1170	METAL BLACK	36	Ø102X62X55	Ø55	1850
LAVIA-15	15W	1950	METAL BLACK	36	Ø102X82X75	Ø75	2400



## BB-S

Power By : **SUNLUX** <sup>LED</sup>



LED Colour : 2700K, 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BB107	7W	840	WB-BB	WR-BK	38	Ø61X93	Ø52	2075
BB207	7Wx2	1640	WB-BB	WR-BK	38	Ø61X140X93	Ø52x125	4069 2400
BB112	12W	1440	WB-BB	WR-BK	38	Ø83X104	Ø72	2580
BB212	12Wx2	2880	WB-BB	WR-BK	38	Ø195X125	Ø175	5200



## FN

Power By : **SUNLUX** <sup>LED</sup>



LED Colour : 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
FN MOV	5W	650	WB	38	Ø40x90	1240



## FN

Power By : **SUNLUX** <sup>LED</sup>



LED Colour : 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
FN FIX	7W	910	BB	38	Ø40x70	1049



## FN Frame

Model	Type	Body Colour	Dimension (mm)	Cutout	DLP
FN1 RD	Modular	WB-BB	Ø50	Ø40	241



## FN Frame

Model	Type	Body Colour	Dimension (mm)	Cutout	DLP
FN1 SQ	Modular	WB-BB	40x50x30	40x50	381
FN2 SQ	Modular	WB-BB	90x50x30	40x85	540
FN3 SQ	Modular	WB-BB	50x138x30	40x124	794

PREMIUM

# STELLA

SERIES

PRECISION  
DESIGN  
POWERFUL  
PERFORMANCE

## COB SPOTLIGHT

ILLUMINATE WITH ELEGANCE.  
PERFORM WITH EXCELLENCE.

The Stella Series COB Spotlight is engineered for spaces that demand superior lighting and refined aesthetics. With its advanced COB technology, precision optics, and sleek design, Stella delivers exceptional brightness, energy efficiency, and visual comfort.



### HIGH LUMEN OUTPUT

Powerful COB LED for brilliant illumination



### PRECISE BEAM CONTROL

Narrow to wide beam options



### PREMIUM BUILD QUALITY

Durable body with high-grade finish



### ADJUSTABLE DESIGN

Flexible tilt & rotation for perfect positioning



### ENERGY EFFICIENT

Low power consumption with long life



## VERSATILE CONFIGURATIONS

### SINGLE SPOTLIGHT



### DOUBLE SPOTLIGHT



### MULTI SPOTLIGHTS



## TECHNICAL SPECIFICATIONS



LIGHT SOURCE  
COB LED



WATTAGE  
7W / 12W / 18W / 25W



COLOR TEMPERATURE  
2700K / 3000K / 4000K / 6000K



CRI  
> 90



BEAM ANGLE  
15° / 24° / 36° / 60°



INPUT VOLTAGE  
AC 100-240V 50/60Hz



MATERIAL  
Aluminium Die-Cast



FINISH  
White / Black



LIFESPAN  
50,000 Hours

## AVAILABLE COLORS



WHITE



BLACK



COMMERCIAL SPACES  
Shops, Offices, Showrooms



HOSPITALITY  
Hotels, Restaurants, Lobbies



RESIDENTIAL  
Living Rooms, Bedrooms,  
Kitchens



GALLERIES & MUSEUMS  
Accentuate Art and  
Architectural Details



### STELLA

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX REF DOUBLE	12X2W	2400	WB-NB	36	Ø160x85x60	Ø150x75	4406



### LANIX

Power By : **Bridgelux** LED



LED Colour : 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX REF	12W	1440	WB	NB	38	Ø85x57	Ø76	2138



### LANIX

Power By : **Bridgelux** LED



LED Colour : 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX FOCUS	12W	1440	WB	NB	38	Ø85x70	Ø75	2138



### LANIX

Power By : **Bridgelux** LED



LED Colour : 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
LANIX SPOT	12W	1440	WB	NB	38	Ø85x57	Ø75	2138



### ORIX

Power By : **Bridgelux** LED



LED Colour : 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX REF	12W	1440	WB	NB	38	Ø65x105	Ø55	2138



### ORIX

Power By : **Bridgelux** LED



LED Colour : 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX FOCUS	12W	1440	WB	NB	38	Ø65x116	Ø55	2138



### ORIX

Power By : **Bridgelux** LED



LED Colour : 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX SPOT	12W	1440	WB	NB	38	Ø65x105	Ø55	2138



### ORIX-SQ

Power By : **Bridgelux** LED



LED Colour : 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector	Beam Angle	Dimension (mm)	Cutout	DLP
ORIX SPOT	18W	1440	WB	NB	38	Ø105x73	Ø95	2138



LED LIGHTING

# PREMIUM TRACK LIGHTING

Precision lighting. Perfect focus.



**ZOOMABLE TRACK LIGHTING**  
Adjust Beam Angle Freely



**STEPLESS ZOOMING**  
Smooth & Precise Angle Adjustment



**PREMIUM BUILD QUALITY**  
Sleek Design.  
Lasting Performance.



## ADJUST BEAM ANGLE FREELY

15°



36°



55°



15° to 60°  
Stepless Zooming



High CRI  
True Color Rendering



Energy Efficient  
Low Power,  
High Output



Easy Installation  
Compatible with  
Standard Tracks



PREMIUM QUALITY



RELIABLE PERFORMANCE



ENERGY EFFICIENT



## BB-S

Power By : **SUNLUX** LED

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	Cutout	DLP
BB107	7W	910	WB-BB	WR-BK	38	Ø61X93	Ø52	2060
BB207	7Wx2	1820	WB-BB	WR-BK	38	Ø61X140X93	Ø52x125	4069
BB112	12W	1560	WB-BB	WR-BK	38	Ø83X104	Ø72	2565
BB212	12Wx2	3120	WB-BB	WR-BK	38	Ø195X125	Ø175	5131



## TYRA

Power By : **SUNLUX** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TYRA12	12W	1560	WB-BB	48	75x100	960
TYRA20	20W	2600	WB-BB	48	75x125	1284
TYRA30	30W	3900	WB-BB	48	90x140	1530
TYRA36S	36W	4680	WB-BB	48	75x145	1890



## TRKB

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TRKB20	20W	2600	WB-BB	36-60	-	2332
TRKB30	30W	3900	WB-BB	36-60	-	2950
TRKB40	40W	5200	WB-BB	36-60	-	3500



## TRKB-AR

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TRKB-AR20	20W	2600	WB-BB	36-60	-	2332
TRKB-AR30	30W	3900	WB-BB	36-60	-	2950
TRKB-AR40	40W	5200	WB-BB	36-60	-	3500



## TRKB-CON

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TRKB-CON12	12W	1560	WB-BB	36-60	50x135	1900
TRKB-CON20	20W	2600	WB-BB	36-60	60x150	2650
TRKB-CON30	30W	3900	WB-BB	36-60	80x180	3250



## TYRA-SF

Power By : **SUNLUX** LED

LED Colour : 2700K, 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TYRA12S	12W	1560	WB-BB	48	75x100	1008
TYRA20SF	20W	2600	WB-BB	48	75x125	1284
WL07SF	7W	910	WB-BB	48		756



## CANVA SURFACE

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CANVA12	12W	1560	WB-BB	36-45	Ø236X15	Ø75	1080



**ON ORDER Ip54  
ADDITIONAL CHARGE**

## SFC

Power By : **SUNLUX** LED



LED Colour : 2700K, 3000K,  
4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
SFC605	5W	650	WB-BB	WR-NB-RG	36	Ø34X58	678
SFC606	7W	910	WB-BB	WR-NB-RG	36	Ø55X100	756
SFC607	12W	1560	WB-BB	WR-NB-RG	36	Ø55X150	1080
SFC616	12W	1560	WB-BB	WR-NB-RG	36	Ø75X100	1116
SFC617	20W	2600	WB-BB	WR-NB-RG	36	Ø75X125	1380
SFC624	24W	3120	WB-BB	NB-RG	36	Ø95X130	1578

## PDL

Power By : **SUNLUX** LED



LED Colour : 2700K, 3000K,  
4000K, 5000K, 6500K



Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
PDL605	5W	650	WB-BB	WR-NB-RG	36	Ø34X58	932
PDL606	7W	910	WB-BB	WR-NB-RG	36	Ø55X100	1014
PDL607	12W	1560	WB-BB	WR-NB-RG	36	Ø55X150	1353
PDL616	12W	1560	WB-BB	WR-NB-RG	36	Ø75X100	1392
PDL617	20W	2600	WB-BB	WR-NB-RG	36	Ø75X125	1669
PDL624	24W	3120	WB-BB	NB-RG	36	Ø95X130	1878

## SFR

Power By : **SUNLUX** LED



LED Colour : 3000K, 4000K, 5000K, 6500K



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
SFR7012	12W	1560	WB-BB	48	Ø75x100	1452
SFR7020	20W	2600	WB-BB	48	Ø75x125	2204
SFR7030	30W	2900	WB-BB	48	Ø100x150	2620
SFR50	50W	6500	WB-BB	48	Ø100x190	3036



## SJ

Power By : **TEEN** LED

12W : **CREE** LED



LED Colour : 2700K, 3000K,  
4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
SJ8	8W	1040	WB-BB	WR-NB-RG	36	53X53X72	948
SJ12	12W	1560	WB-BB	WR-NB-RG	36	75X75X95	1128
SJ 24	24W	3120	WB-BB	WR-NB-RG	36	75X50X95	1704




## NEXUS PREMIUM SURFACE

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
CANVA12	12W	1560	WB-BB	36-45	Ø236X15	Ø55	1700
CANVA18	18W	2340	WB-BB	36-45	Ø236X15	Ø75	2075

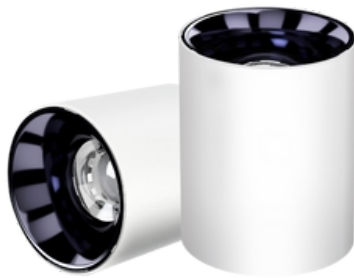

## LUNA PREMIUM SURFACE IP65

Power By : **Bridgelux** LED

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LUNA07	07W	910	WB-BB	36-45	Ø236X15	Ø55	2250
LUNA12	12W	1560	WB-BB	36-45	Ø236X15	Ø75	3300
LUNA18	18W	2340	WB-BB	36-45	Ø236X15	Ø95	4750
LUNA24	24W	3120	WB-BB	36-45	Ø236X15	Ø115	6750
LUNA30	30W	3900	WB-BB	36-45	Ø236X15	Ø145	9600



## NEXUS SURFACE PINHOLE

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
NEX08	08W	910	WB-BB	24	Ø55X69	Ø55	1650
NEX12	12W	1520	WB-BB	24	Ø62X74	Ø75	2050
NEX20	20W	2600	WB-BB	24	Ø62X74	Ø95	3150



BT8 (Honeycomb)

## BTSFC

Power By : **SUNLUX** LED



LED Colour : 2700K, 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
BT12SFC	12W	1560	WB-BB	HONEYCOMB+BK & RG	38	Ø76X85	2291
BT15SFC	15W	1950	WB-BB	WH-BK	38	Ø100X105	2442



## BTZ

Power By : **SUNLUX** LED 12W : **CREE** LED



LED Colour : 2700K, 3000K, 4000K, 5000K, 6500K

Model	Watt	Lumens	Body Colour	Reflector Colour	Beam Angle	Dimension (mm)	DLP
BTZ 8	8W	1040	WB-BB	WH-NB-RG	36	59X59X77	1230
BTZ 12	12W	1560	WB-BB	WH-NB-RG	36	73X73X91	1470
BTZ 15	15W	1950	WB-BB	WH-NB-RG	36	73X73X91	1740



LED Lighting

# MOON PREMIUM SURFACE DOWNLIGHT

## NEW DESIGN

Minimalist elegance.  
Maximum impact.

Crafted with precision and designed for modern interiors, our Moon Premium Surface Downlight delivers refined illumination with a sleek architectural presence.



## COLOR OPTIONS



CRI  
>90

UGR  
<19

36°

AC  
220-240V

IP20



PREMIUM  
FINISH



HIGH PERFORMANCE  
LED



EASY SURFACE  
INSTALLATION



ENERGY  
EFFICIENT




LONG  
LIFESPAN

## SPECIFICATIONS

Type	Surface Downlight
Material	Aluminium
Light Source	High Performance LED
Power	6W / 12W / 18W / 24W
Color Temperature	2700K / 3000K / 4000K / 6000K
CRI	>90
Beam Angle	36°
Input Voltage	AC 220-240V
IP Rating	IP20
Finish Options	8 Premium Combinations
Lifespan	50,000 Hours

## DIMENSIONS

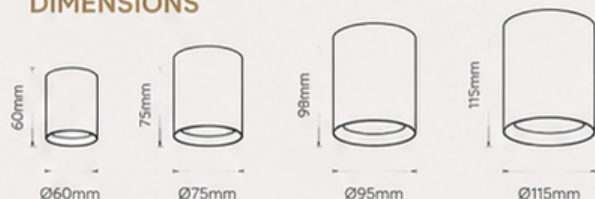

MODERN DESIGN  
Seamless integration  
with any interior



SOFT & FOCUSED LIGHT  
Comfortable ambiance  
with reduced glare



DURABLE BUILD  
High-quality aluminium  
for long-lasting use



IDEAL FOR  
Homes, Hotels, Offices,  
Retail & Hospitality



## MOON

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
MOON-12	12W	1560	WB-BB	60	Ø92X65X75	1450
MOON-18	18W	2340	WB-BB	60	Ø122X65X75	2050
MOON-24	24W	3120	WB-BB	60	Ø142X65X75	2900



## RDD PRO

Power By : **EDISON** LED



LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RDD PRO 12	12W	1560	WB-BB/BB-WB	120	Ø100x100x48	Ø92	1000
RDD PRO 18	18W	2340	BB-SB/WB-SB	120	Ø130x130x48	Ø120	1350
RDD PRO 24	24W	3120	WB-RG/BB-RG	120	Ø150x150x48	Ø140	1840
RDD PRO CC 12	12W	1560	WB-BB/BB-WB	120	Ø100x100x48	Ø92	1300
RDD PRO CC 18	18W	2340	BB-SB/WB-SB	120	Ø130x130x48	Ø120	1950
RDD PRO CC 24	24W	3120	WB-RG/BB-RG	120	Ø150x150x48	Ø140	2640



## RLD

Power By : **EDISON** LED



LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RLD12RD	12W	1560	WB-BB	100	Ø118X50	Ø108	780
RLD18RD	18W	2340	WB-BB	100	Ø145X57	Ø137	1002
RLD18CC	18W	2340	WB-BB	100	Ø145X57	Ø137	1596
RLD24RD	24W	3120	WB-BB	100	Ø175X65	Ø165	1380
TNRLD20RD	20W	2600	WB BB	100	Ø175X65	Ø165	2484



## RLD

Power By : **EDISON** LED



LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
RLD18SQ	18W	2160	WB-BB	100	Ø145X57	Ø137	1002
RLD18-SQCC	18W	2160	WB-BB	100	Ø145X57	Ø137	1596
RLD24SQ	24W	2880	WB-BB	100	170x170x65	158x158	1380
(TUNABLE) TN RLD20SQ/RD	20W	2880	WB-BB	100	170x170x65	158x158	2484



## JDD

Power By : **EDISON** LED



LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
JDD12	12W	1560	WB	100	Ø87x50	Ø72	690
JDD15	15W	1950	WB	100	Ø105x50	Ø90	876
JDD22	22W	2860	WB	100	Ø125x60	Ø105	1062



## VENUS DOWNLIGHT

Power By : **Bridgelux** LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
VENUS07	07W	910	WB-BB	36-45	Ø55X69	Ø35	475
VENUS12	12W	1560	WB-BB	36-45	Ø62X74	Ø45	650
VENUS18	18W	2340	WB-BB	36-45	Ø72X78	Ø55	875



15MM BORDER

## LB ALUMINUM HEAVY BODY

Power By : EDISON LED

LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LB 12	12W	1560	WB-BB	120	Ø125X125X23	Ø115	828
LB 15	15W	1950	WB-BB	120	Ø142X142X23	Ø133	906
TN LB 15	15W	1950	BB	120	Ø142X142X23	Ø133	1872
LB 15 SF	15W	1950	WB-BB	120	Ø135X135X30	Ø133	1200
LB 24	24W	3120	WB-BB	120	Ø200X200X23	Ø187	1620

## LZP ALUMINIUM HEAVY BODY

Power By : EDISON LED LED Colour : 3000K, 4000K, 6500K



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LZP15SQ	15W	1950	WB	120	168X168X22	143X143	828
LZP18SQ	18W	2340	WB	120	180X180X25	160X160	1110
LZP22SQ	22W	2860	WB	120	220X220X22	195X195	1272
TN LZP15SQ	15W	1950	TUNABLE	120	168X168X22	143X143	1758
TN LZP15RD	15W	1950	TUNABLE	120	180X180X2	143X143	1758

## LZP-AS-SURFACE ALUMINUM

Power By : EDISON LED LED Colour : 3000K, 4000K, 6500K



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout (mm)	DLP
LZP6SFRD/SQ	6W	600	WB	120	Ø108X22	Ø101	510
LZP8SFRD/SQ	8W	800	WB	120	Ø150X22	Ø101	510
LZP12SFRD/SQ	12W	1200	WB	120	Ø180X22	Ø127	576
LZP15SFRD/SQ	15W	1500	WB	120	Ø180X22	Ø152	600
LZP18SFRD/SQ	18W	1800	WB	120	Ø240X22	Ø178	690
LZP22SFRD/SQ	22W	2200	WB	120	Ø240X22	Ø203	936

## LZP-AS-CC

Power By : EDISON LED

LED Colour : 3000K, 4000K, 6500K



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LZP8RD/SQCC	8W	800	WB	120	Ø150X22	Ø101	552
LZP15RD/SQCC	15W	1500	WB	120	Ø180X22	Ø152	630
LZP22RD/SQCC	22W	2200	WB	120	Ø240X22	Ø203	1068
LZP8RD/SQCCSF	8W	800	WB	120	Ø150X22	Ø101	612
LZP15RD/SQCCSF	15W	1500	WB	120	Ø180X22	Ø152	720
LZP22RD/SQCCSF	22W	2200	WB	120	Ø240X22	Ø203	1116

## PZP (POLY CARBONATE MATERIAL)

Power By : EDISON LED



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PZP8RD/SQ	8W	800	WB	120	Ø150X22	Ø101	336
PZP12RD/SQ	12W	1200	WB	120	Ø180X22	Ø127	354
PZP15RD/SQ	15W	1500	WB	120	Ø180X22	Ø152	420
PZP18RD/SQ	18W	1800	WB	120	Ø240X22	Ø178	636
PZP22RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	840
PZP15RD/SQSF	15W	1500	WB	120	Ø180X22	Ø152	528
PZP22RD/SQSF	22W	2200	WB	120	Ø240X22	Ø203	600



## LZP-AS (ALUMINIUM)

Power By : EDISON LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
LZP6RD/SQ	6W	600	WB	120	Ø108X22	Ø101	384
LZP8RD/SQ	8W	800	WB	120	Ø150X22	Ø101	420
LZP12RD/SQ	12W	1200	WB	120	Ø180X22	Ø127	438
LZP15RD/SQ	15W	1500	WB	120	Ø180X22	Ø152	576
LZP18RD/SQ	18W	1800	WB	120	Ø240X22	Ø178	612
LZP22RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	828



## PZP-SF (POLY CARBONATE MATERIAL)

Power By : EDISON



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PZP8RD/SQCC	8W	800	WB	120	Ø150X22	Ø101	408
PZP15RD/SQCC	15W	1500	WB	120	Ø180X22	Ø152	540
PZP22RD/SQCC	22W	2200	WB	120	Ø240X22	Ø203	960
PZP8RD/SQCCSF	8W	800	WB	120	Ø150X22	Ø101	480
PZP15RD/SQCCSF	15W	1500	WB	120	Ø180X22	Ø152	648
PZP22RD/SQCCSF	22W	2200	WB	120	Ø240X22	Ø203	1080



## LZR (ALUMINIUM)

Power By : EDISON

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
LZR 12RD/SQ	12W	1440	WB-BB	120	Ø100	723
LZR 18RD/SQ	18W	2160	WB-BB	120	Ø150	1155
LZR 22SQ	22W	2640	WB-BB	120	Ø195	1598
LZR 36RD/SQ	36W	4320	WB	120	Ø220	1917



## PZR (PLASTIC)

Power By : EDISON

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
PZR 8	8W	600	WB-BB	120	Ø100	348
PZR 15	15W	1200	WB-BB	120	Ø150	540
PZR 22	22W	1800	WB-BB	120	Ø195	702



## LB 2X2

Power By : EDISON

LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
LB 36	36W	4320	WB	120	Ø609X600	3300
LB 48	48W	5760	WB	120	Ø609X600	3480



## LB BACKLIGHT PLASTIC



Power By : EDISON LED LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
LB 36	36W	4320	WB	120	Ø609X600	2376

ON ORDER 4PCS BOX PACKING



SENSOR

## PZP SENSOR CONCEAL

Power By : EDISON LED

### 100-50 & 100-0



Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	Cutout	DLP
PZPSN 15SQ/RD	15W	1500	WB	120	Ø180X22	Ø152	1503
PZPSN 22RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	2196
PZPSN SF 15SQ/RD	15W	1500	WB	120	Ø180X22	Ø152	1503
PZPSN SF22RD/SQ	22W	2200	WB	120	Ø240X22	Ø203	2197

ON ORDER 20PCS BOX PACKING



## TPF

Power By : CREE LED



LED Colour : 3000K, 4000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension (mm)	DLP
TPF507018	18W	1800	WB-BB	120	2 Ft x 50mm x 72mm	1630
TPF507040	40W	4000	WB-BB	120	4 Ft x 50mm x 72mm	2445
TPF507080	80W	14400	WB-BB	120	8 Ft x 50mm x 72mm	4590
TPF507072	72W	7200	WB-BB	120	4 Ft x 50mm x 72mm	4890
TPF507040	40W	4000	WB-BB/ 3 in 1	120	4 Ft x 50mm x 72mm	3115
TN-TPF507040	40W	7200	WB-BB/ TN Remote+BT	120	4 Ft x 50mm x 72mm	4570



## HANGING WIRE (PAIR) 8 PC BOX PACKING

Model	Body Colour	Dimension	DLP
HG	STEEL	2 meter	250



20 PC BOX PACKING  
MINIMUM ORDER 100 PC

## PSF DOB



Power By : EDISON LED LED Colour : 3000K, 6500K

Model	Watt	Lumens	Body Colour	Beam Angle	Dimension	DLP
PSF 8	8W	800	WB	120	1FT	302
PSF 12	12W	1200	WB	120	2FT	416
PSF 18	18W	1800	WB	120	3FT	610

A Class of it's own...



LED Lighting



# MAGNETIC TRACK LIGHTING

# 5mm Magnetic Track lights



## PROFILE LIGHT TILTABLE



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
12W	L230*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2000
18W	3385*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2880
30W	L555*W26*H24mm	DC48V	≥90	300K, 400K, 600K	3560



## LINEA LIGHT TILTABLE



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L122*W26*H24mm	DC48V	≥90	300K, 400K, 600K	1560
12W	L230*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2160
18W	L338*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2800
24W	L445*W26*H24mm	DC48V	≥90	300K, 400K, 600K	2800

# 5mm Magnetic Track lights



## FODING PROFILE SMD LINEAR



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
12W	L230*W26*H80mm	DC48V	≥90	300K, 400K, 600K	3240



## FOLDING LINEA LIGHT



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L122*W26*H80mm	DC48V	≥90	300K, 400K, 600K	2000
12W	L230*W26*H80mm	DC48V	≥90	300K, 400K, 600K	3280

# 5mm Magnetic Track lights



## TRACK LIGHT



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	42*100mm	DC48V	≥90	300K, 400K, 600K	1860
10W	48*105mm	DC48V	≥90	300K, 400K, 600K	2800
20W	58*130mm	DC48V	≥90	300K, 400K, 600K	3640



## DUAL TRACK LIGHT



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
6W+6W	45*100mm*2	DC48V	≥90	300K 400K 600K	4400

# 5mm Magnetic Track lights



## TERNARY LIGHT



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L122xW26xH55mm	DC48V	≥90	300K, 400K, 600K	3240




## TRACK LINEA LIGHT



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
9W	95x30mm	DC48V	≥90	300K 400K 600K	3840

# 5mm Magnetic Track lights

## ADJUSTABLE SF CYLINDER



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	W75*H75mm	DC48V	≥90	300K, 400K, 600K	3800

## TRACK LINEA LIGHT



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
9W	Ø40*H300	DC48V	≥90	300K 400K 600K	3660

# 5mm Magnetic Track lights



## SMD PENDENT SOFT LIGHT



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	100x100mm	DC48V	≥90	300K, 400K, 600K	4680



## HOSE LIGHT



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
09W	L500mm	DC48V	≥90	300K, 400K, 600K	3520
16W	L1000mm	DC48V	≥90	300K, 400K, 600K	5240
32W	L2000mm	DC48V	≥90	300K, 400K, 600K	7760

# 5mm Magnetic Track lights



## SMD PENDENT EARTH LAMP



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	150*150mm	DC48V	≥90	300K, 400K, 600K	4040



## SMD PROFILE LIGHT



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
9W	300*26mm	DC48V	≥90	300K 400K 600K	2000

# 5mm Magnetic Track lights

## DRIVER



WATT	PRODUCT SIZE (MM)	PRICE
100W	Size:L210xW26xH24mm	3320
200W	Size:L310xW26xH24mm	4680

## SLIM SURFACE CHANNEL



PRODUCT SIZE (MM)	PRICE
Size:L1000xW26xH6.3mm	1440
Size:L2000xW26xH6.3mm	2680

## SLIM CONSEAL CHANNEL



PRODUCT SIZE (MM)	PRICE
Size:L1000xW56 6xH6.3mm	1440
Size:L2000xW56 6xH6.3mm	2680

## DRIVER CABLE BOX




PRODUCT SIZE (MM)	PRICE
Size:L100xW26xH29mm	600

## EXTERNAL DRIVER CONNECTOR



PRICE  
1200

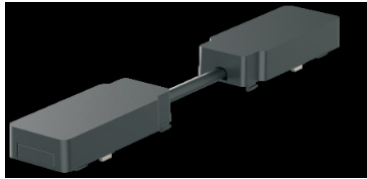

CONDUCTION  
MODULE



PRICE  
680



PRICE  
600



PRICE  
600



PRICE  
920



PRICE  
1000


JOINTER FOR  
SLIM SURFACE  
& SLIM CONSEAL



# 11mm Magnetic Track lights




## Magnetic Flood light

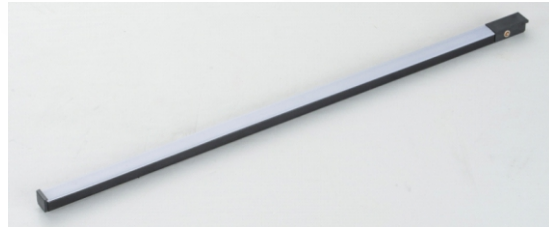

### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
12W	L300*W11mm	DC48V	≥90	300K, 400K, 600K	2800




## Magnetic Grille light



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
12W	L300*W11mm	DC48V	≥90	300K, 400K, 600K	3400

# 11mm Magnetic Track lights

## Magnetic Flooding grille light



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
06W	L118*W22*H95mm	DC48V	≥90	300K, 400K, 600K	3880
12W	L118*W22*H95mm	DC48V	≥90	300K, 400K, 600K	4800

## Magnetic Spotlight



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
12W	L300*W11mm	DC48V	≥90	300K, 400K, 600K	3600

# 11mm Magnetic Track lights



## Focusing magnetic track light



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR



LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
07W	Φ35*H90mm	DC48V	≥90	300K, 400K , 600K	3400



## Magnetic Square Track Light



### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR




LED DC 40V IP20

WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	PRICE
07W	64*64*44	DC48V	≥90	300K, 400K, 600K	3,520

# 11mm Magnetic Track lights

**Micro 150W driver**

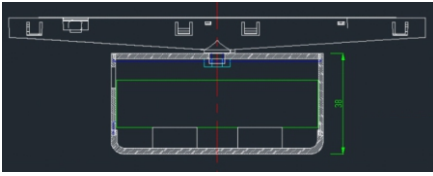

PRODUCT SIZE (MM) : 82\*32  
PRICE - 5040

**Track connector**




PRODUCT SIZE (MM) : 16.7\*11\*11.7mm  
PRICE - 720

**Track connector**



PRODUCT SIZE (MM) : 17\*11\*7mm  
PRICE - 1280



**Concealed horizontal connceotor**  
PRODUCT SIZE (MM) : 50\*50\*10.4mm  
PRICE - 800



**Concealed vertical connceotor**  
PRODUCT SIZE (MM) : 50\*19\*50mm  
PRICE - 800



**Concealed horizontal connceotor**  
PRODUCT SIZE (MM) : 50\*50\*10.4mm  
PRICE - 800



**Concealed Vertical connceotor**  
PRODUCT SIZE (MM) : 50\*19\*50mm  
PRICE - 800


---

---

---

# 25MM MAGNETIC TRACK RAIL

## 25MM RECESSED MAGNETIC TRACK RAIL

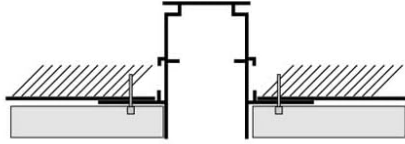

### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR




LED DC 40V IP20

PRODUCT SIZE (MM)	DESCRIPTION	PRICE
MG-TRACK-01-1M	POP CONSEAL-1 MTR	1320
MG-TRACK-01-2M	POP CONSEAL-2 MTR	2420
MG-TRACK-01-3M	POP CONSEAL-3 MTR	3465

## 25MM SURFACE MOUNTED /

## PENDANT MOUNTED MAGNETIC TRACK RAIL

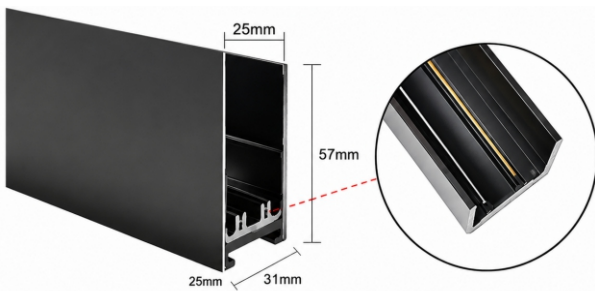

Surface Mounted/ Pendant Mounted

### Information

CRI: 90  
 Material: Aluminum  
 LED Type: SMD2835  
 Protection Class: IP20  
 CCT: 3000-6000K

### COLOR




LED DC 40V IP20

PRODUCT SIZE (MM)	DESCRIPTION	PRICE
MG-TRACK-01-1M	POP CONSEAL-1 MTR	1320
MG-TRACK-01-2M	POP CONSEAL-2 MTR	2420
MG-TRACK-01-3M	POP CONSEAL-3 MTR	3465

# 25MM MAGNETIC TRACK RAIL



## Magnetic Profile

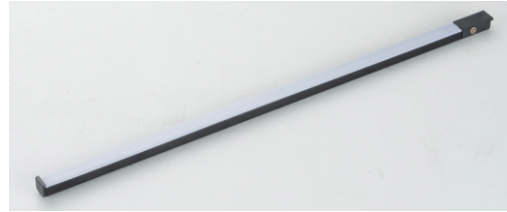

### Information

**CRI:** 90  
**Material:** Aluminum  
**LED Type:** SMD2835  
**Protection Class:** IP20  
**CCT:** 3000-6000K

### COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-PROFILE-12W	12W	L307*W22*H25mm	DC48V	≥90	300K, 400K, 600K	935
MG-PROFILE-20W	20W	L607*W22*H25mm	DC48V	≥90	300K, 400K, 600K	1375



## MAGNETIC LINEAR RZR SPOTLIGHTS



### Information

**CRI:** 90  
**Material:** Aluminum  
**LED Type:** SMD2835  
**Protection Class:** IP20  
**CCT:** 3000-6000K

### COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-RZR-LINEAR-06	6W	L110*W22*H80mm	DC48V	≥90	300K, 400K, 600K	935
MG-RZR-LINEAR-12	12W	L220*W22*H80mm	DC48V	≥90	300K, 400K, 600K	1045
MG-RZR-LINEAR-20	20W		DC48V	≥90	300K, 400K, 600K	1950

# 25MM MAGNETIC TRACK RAIL



## MAGNETIC LINEAR RZR MOVABLE SPOTLIGHTS



### Information

**CRI:** 90  
**Material:** Aluminum  
**LED Type:** SMD2835  
**Protection Class:** IP20  
**CCT:** 3000-6000K

### COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-RZR-LINEAR-M-06	06W	L110*W22*H80mm	DC48V	≥90	300K, 400K, 600K	1420
MG-RZR-LINEAR-M-12	12W	L220*W22*H80mm	DC48V	≥90	300K, 400K, 600K	1685



## MAGNETIC TRACK LIGHT



### Information

**CRI:** 90  
**Material:** Aluminum  
**LED Type:** SMD2835  
**Protection Class:** IP20  
**CCT:** 3000-6000K

### COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-TRACK-10	10W	Φ48*H135	DC48V	≥90	300K, 400K, 600K	1842
MG-TRACK-20	20W	Φ48*H160	DC48V	≥90	300K, 400K, 600K	2365

# 25MM MAGNETIC TRACK RAIL



## MAGNETIC PENDANT LIGHT



### Information

**CRI:** 90  
**Material:** Aluminum  
**LED Type:** SMD2835  
**Protection Class:** IP20  
**CCT:** 3000-6000K

### COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-PDL-06	06W	Φ30*H300	DC48V	≥90	300K, 400K, 600K	2150
MG-PDL-12	12W	Φ94*H300	DC48V	≥90	300K, 400K, 600K	2355



## MAGNETIC L-CORNER



### Information

**CRI:** 90  
**Material:** Aluminum  
**LED Type:** SMD2835  
**Protection Class:** IP20  
**CCT:** 3000-6000K


### COLOR



PRODUCT NAME	WATT	PRODUCT SIZE (MM)	VOLTAGE	BEAM ANGLE	CCT	Price
MG-L-CORNER-10	10W	Φ48*H135	DC48V	≥90	300K, 400K, 600K	2100
MG-L-CORNER-20	20W	Φ48*H160	DC48V	≥90	300K, 400K, 600K	2570


# 25MM MAGNETIC TRACK RAIL

**MG-JOINTER-01**

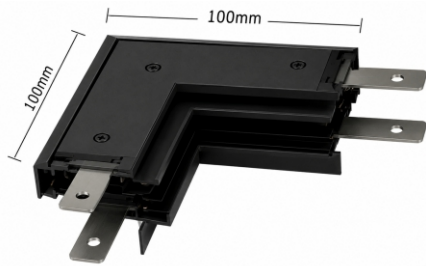


POP CONCEAL VERTICAL CORNER  
DLP - 650

**MG-JOINTER-01**

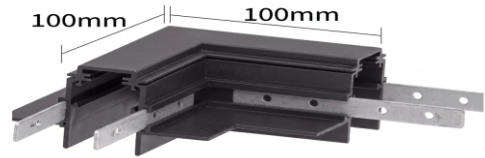


POP CONCEAL HORIZONTAL CORNER  
DLP - 650

**MG-JOINTER-02**

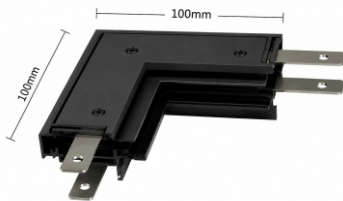


REGULAR SURFACE  
VERTICAL CORNER  
DLP - 650

**MG-JOINTER-02**

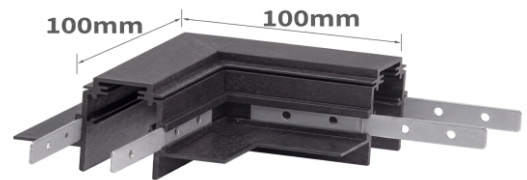


REGULAR SURFACE  
HORIZONTAL CORNER  
DLP - 650

**MG-JOINTER-03**

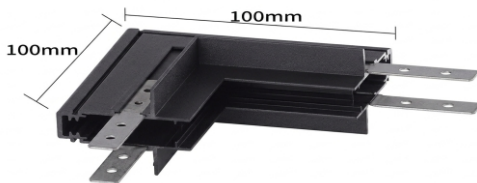

REGULAR SURFACE  
VERTICAL CORNER  
DLP - 650

**MG-JOINTER-03**

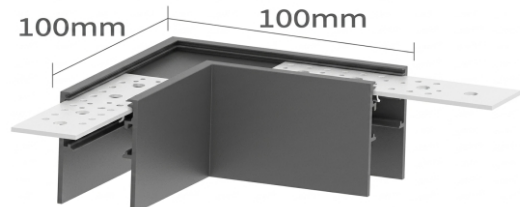

REGULAR SURFACE  
HORIZONTAL CORNER  
DLP - 650

**MG-ENDCAP-01**



R20 EMBEDDED  
TRACK PLUG  
DLP - 100

**MG-ENDCAP-02**



S20 SURFACE  
TRACK PLUG  
DLP - 100

# 25MM MAGNETIC TRACK RAIL

## MG-DRIVER-100W



LED Single color driver 100W  
Heavy duty 100% power  
DLP - 2320

## MG-DRIVER-200W



LED Single color driver 200W  
Heavy duty 100% power  
DLP - 3530

## MG-MODULE-CORNER



CORNER CONDUCTIVE MODULE  
DLP - 650

## MG-MODULE-STATE



THROUGH CONDUCTIVE MODULE  
DLP - 650

## MG-INPUT-MODULE



SWITCHING POWER  
INPUT MODULE  
DLP - 330

## MG-HANGING-WIRE



TRACK HANGING  
WIRE BAG  
DLP - 550

## MG -SURFACE TRACK PENDANT ACCESSORY



2 PIECES  
DLP - 1000

### SMPS 12V



Model	Volt	DLP
SP 2	12VDC	453
SP 5	12VDC	578
SP 8.5	12VDC	738
SP 10.5	12VDC	804
SP 12.5	12VDC	1004
SP 16.5	12VDC	1134

### SMPS 24V



Model	Volt	DLP
SP 2	24VDC	667
SP 5	24VDC	1036
SP 8.5	24VDC	1231
SP 10.5	24VDC	1425
SP 12.5	24VDC	1490
SP 16.5	24VDC	1140

### LED STRIP LIGHT - 12V



ON ORDER

AVAILABLE COLOUR

● 2700k ● 3000k ● 4000k ● 5000k ○ 6000k

Model	Watt per mt	PCB WIDTH	CRI	IP RATING	DLP (5Meter)
2835/120	12W	5 mm	80/90	IP-20	
2835/120	12W	8 mm	80/90	IP-20	
2835/180	12W	5 mm	80/90	IP-20	
2835/240	20W-L	10 mm	80/90	IP-20	
2835/180	20W-M	10 mm	80/90	IP-20	
2835/120	20W-H	10 mm	80/90	IP-20	

### LED STRIP LIGHT - 24V



ON ORDER

AVAILABLE COLOUR

● 2700k ● 3000k ● 4000k ● 5000k ○ 6000k


Model	Watt per mt	PCB WIDTH	CRI	IP RATING	DLP (5Meter)
2835/120	11W	5 mm	80/90	IP-20	
2835/120	11W	8 mm	80/90	IP-20	
2835/180	15W	5 mm	80/90	IP-20	
2835/240	12W	10 mm	80/90	IP-20	
2835/240	12W	10 mm	80/90	IP-20	
2835/240	12W	10 mm	80/90	IP-20	

### LED STRIP LIGHT - 24V IP65



● ● ● ● ○

Model	Watt per mt	PCB WIDTH	CRI	IP RATING	DLP (5Meter)
2835/120	11W	10MM	80/90	IP65	
2835/120	11W	10MM	80/90	IP65	

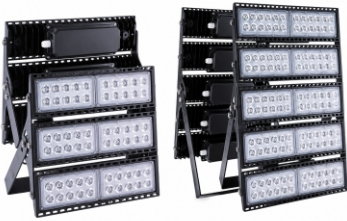

## STDM

Power By : OSRAM LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
STDM-100	100W	13000	GRAY	65	120	390X95X100	-
STDM-200	200W	26000	GRAY	65	120	390X200X100	-
STDM-500	500W	65000	GRAY	65	120	390X510X100	-
STDM-1000	1000W	130000	GRAY	65	120	780X510X100	-

## FD GL

Power By : OSRAM LED



Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
FD30GL	30W	390	GRAY	65	120	120X140X32	1092
FD50GL	50W	6500	GRAY	65	120	220x215x60	1276
FD100GL	100W	13000	GRAY	65	120	280x270x60	2150
FD150GL	150W	19500	GRAY	65	120	320x310x60	3217
FD200GL	200W	26000	GRAY	65	120	320x310x60	4301
FD400GL	400W	52000	GRAY	65	120	462X500X70	10695

ON ORDER: GREEN, RED & BLUE (ADDITIONAL CHARGES AS PER WATT)



## SL GL

Power By : OSRAM LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
SL24Z	24W	3120	GRAY	65	120	105x310	787
SL36Z	36W	4680	GRAY	65	120	128x355	1023
SL50Z	50W	6500	GRAY	65	120	160x375	1322
SL100Z	100W	13000	GRAY	65	120	220x510	2127
SL150Z	150W	19500	GRAY	65	120	220x510	3404



## UFO HB

Power By : OSRAM LED

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
UFO 50	50W	6500	GRAY	65	120	310x220	3001
UFO 100	100W	13000	GRAY	65	120	310x220	4433
UFO 150	150W	19500	GRAY	65	120	360x220	5393
UFO 200	200W	26000	GRAY	65	120	310x220	6187



## HB UFO FLAMMABLE IP 65

Power By : BRIDGELUX

SAUCER WELL GLASS LIGHT (HEAVY WEIGHT)



Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension (mm)	DLP
UFO FL 30	30W	3600	GRAY	65	90/120		7774
UFO FL 45	45W	5400	GRAY	65	90/120		8998
UFO FL 60	60W	7200	GRAY	65	90/120		10051
UFO FL 80	80W	9600	GRAY	65	90/120		11488
UFO FL 100	100W	12000	GRAY	65	90/120		11983

A Class of it's own...



LED Lighting

# LED WALL LAMPS & MIRROR LIGHTS

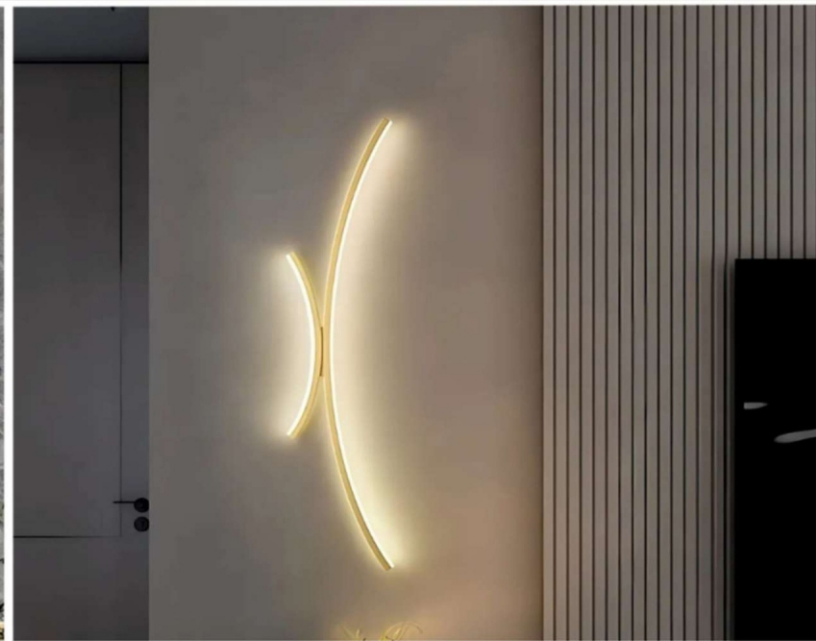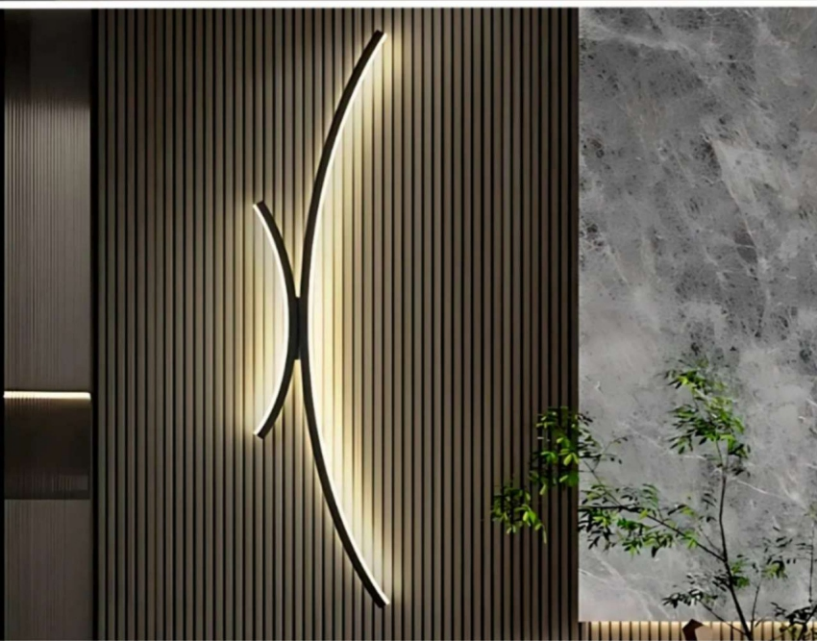



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 199	10W	H:240	1632

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 200	10W	H:240	1632

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 201	10W	H:240	1632

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 202	10W	H:240	1632

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 203	10W	H:240	1632

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 204	10W	H:240	1632


LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 205	12W	H:600	2052

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 206	18W	H:600	2130


LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 207	20W	H:600	2130


LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 208	24W	H:600	2130


LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 209	24W	H:600	2130

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 210	24W	H:600	2130

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 211	16W	H:600	2004

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 212	12W	H:600	1878


LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 213	16W	H:600	1878

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 214	16W	H:600	2052

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 215	24W	H:900	2202

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 284	6W	H:240	1800

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 266	20W	H:240	2454

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 272	15W	H:240	1944

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 274	20W	H:240	2478

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 276	15W	H:600	2130

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 278	18W	H:600	2004

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 292	24W	H:600	1878

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	Body Color	DLP
WL 294	18W	H:460	WB-BB	1632
WL 294	18W	H:460	RB-GL-RG BRONZE	1752

LED Colour : 4000K/3000K    10 PCS box packing



**WL** Power By : **TEEN LED**

Model	Watt	Dimension(mm)	DLP
WL 290	20W	H:240	2880

LED Colour : 4000K/3000K



**PML10CC**

Model	Watt	Dimension(mm)	DLP
PML10CC	10W	2 Ft x 50mm x 72mm	-

LED Colour : 4000K/3000K



**WL** Power By : **TEEN LED**


Model	Watt	Dimension(mm)	DLP
WL 650	10W	190x291	1380

LED Colour : 4000K/3000K

A Class of it's own...



LED Lighting

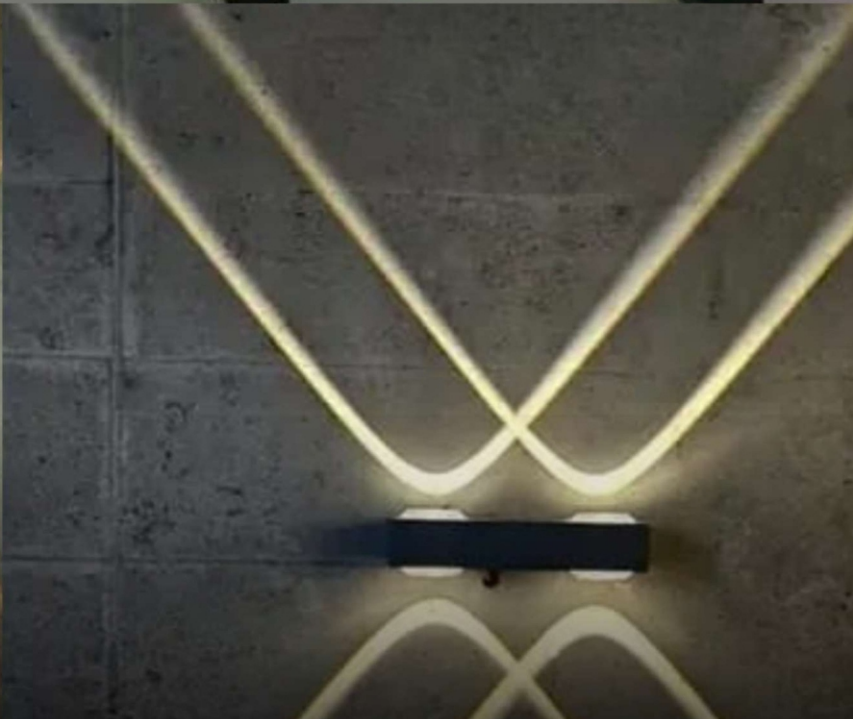

# OUTDOOR IP65 WATERPROOF

Aluminum lamp body, outdoor effective waterproof rain seamless access

# LED GATE LIGHTS

— POLY CARBONATE HOUSING —



**ROYAL**

Wattage : 20W

Color : W/WW

DLP : ₹1945/-



**LOBINI**

Wattage : 30W

Color : W/WW

DLP : ₹2815/-



**ZEN**

Wattage : 20W

Color : W/WW

DLP : ₹1560/-



**FOTON**

Suitable for LED Bulb

Color : W

DLP : ₹ 950/-



**ORA**

Wattage : 20W

Color : W/WW

DLP : ₹1375/-



**ALPINA**

Wattage : 20W

Color : w/ww

DLP : ₹ 1500/-



**ACURA**

Wattage : 20W

Color : w/ww

DLP : ₹ 2500/-



**KEERA**

Wattage : 20W

Color : w/ww

DLP : ₹ 2250/-



**MOON**

Suitable for LED Bulb

Color : W

DLP : ₹ 1125/-



### OBH

Power By : TEEN

LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OBH - 10	10W	1200	WHITE	65	120	230
OBH - 20	20W	2400	WHITE	65	120	320



### GL 115

Power By : TEEN

LED Colour : 3000K, 4000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
GL 115	5W	1200	BLACK	65	120	690
GL 165	10W	1000	BLACK	65	120	810



### ODL

Power By : TEEN

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL 452 (TWO WAY)	3W	250	GRAY/ BLACK	65	45	80x60x35	561



### ODL

Power By : TEEN

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL 452/2 (FOUR WAY)	5W	345	GRAY/ BLACK	65	45	80x110x35	810



### ODL

Power By : TEEN

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL 452/3 (SIX WAY)	7W	455	GRAY/ BLACK	65	45	80x160x35	1074



### ODL

Power By : TEEN

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimensions (mm)	DLP
ODL 452/4 (EIGHT WAY)	10W	960	GRAY/ BLACK	65	45	80x210x35	1488




### ODL

Power By : TEEN

LED Colour : 3000K

Dimension (mm)

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL104S	3W	GRAY	65	80	696
ODL104	6W	GRAY	65	80	768






### ODL

Power By : TEEN



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL103S	2x3W	GRAY	65	80	838
ODL103	2x6W	GRAY	65	80	958




### ODL

Power By : EDISON



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL419	3W	GRAY	65	45	798
ODL419	6W	GRAY	65	45	1110




### ODL

Power By : EDISON



LED Colour : 3000K



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL454	10W	GRAY	65	110	1123




### ODL

Power By : TEEN



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL415	7W	GRAY	65	90	1137




### ODL

Power By : EDISON



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL416	3W	GRAY	65	45	726




### ODL

Power By : TEEN



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL453	10W	BLACK	65	60	1176




### ODLS

Power By : TEEN



LED Colour : 3000K

Dimension (mm)



Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL438S	4W	WB-GRAY	65	45	828



### ODL


Power By : TEEN



LED Colour : 3000K

Dimension (mm)

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL438	8W	WB-GRAY	65	45	876



### ODL


Power By : TEEN



LED Colour : 3000K

Dimension (mm)

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL466	6W	GRAY	65	45	984



### ODL


Power By : EDISON



LED Colour : 3000K

Dimension (mm)

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL467	4W	GRAY	65	55	960
ODL467	6W	GRAY	65	55	1080



### ODL


Power By : EDISON



LED Colour : 3000K

Dimension (mm)

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL456	3W	WB-GRAY	65	45	698



### ODLS 445 PLASTIC


Power By : EDISON



LED Colour : 3000K

Dimension (mm)

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL445 - P	4W	WB-GRAY	65	45	450



### ODL


Power By : EDISON



LED Colour : 3000K

Dimension (mm)

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL445	5W	WB-GRAY	65	45	848
ODL445	12W	WB-GRAY	65	45	1248
(2 LEG) ODL 445 S	3W	WB-GRAY	65	45	792



### ODLS


Power By : EDISON



LED Colour : 3000K

Dimension (mm)

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL464S (One leg)	1W	WB-GRAY	65	45	561



### ODL


Power By : EDISON



LED Colour : 3000K

Dimension (mm)

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL464	3W	WB-GRAY	65	45	612






### ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL425-2	5W	GRAY	65	45	882
ODL425-3	7W	GRAY	65	45	1002

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : TEEN LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL426-1	3W	GRAY	65	45	960

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL426-2	5W	GRAY	65	45	1020

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL426-3	7W	GRAY	65	45	1140

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL423	4W	GRAY	65	45	996

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL475	5W	GRAY	65	45	948

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : EDISON LED

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL405	10W	GRAY	65	120	1080
ODL406	16W	GRAY	65	120	1200

LED Colour : 3000K

Dimension (mm)







### ODL

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL431	16W	GRAY	65	360	2065

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL450	14W	RD / SG	65	360	2065

LED Colour : 3000K

Dimension (mm)





### ODL

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL474/1	1W	Black+Gold	65	25	660

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL474/2	2W	Black+Gold	65	25	811

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL474/3	3W	Black+Gold	65	25	964

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL474/Y	4W	Black+Gold	65	25	1116

LED Colour : 3000K

Dimension (mm)




### ODL

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL474/X	4W	Black+Gold	65	25	1116

LED Colour : 3000K

Dimension (mm)






### ODL 474/4

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL474/4	4W	Black+Gold	65	25	1116

LED Colour : 3000K

Dimension (mm)





### ODL 474/5

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL474/5	5W	Black+Gold	65	25	1295

LED Colour : 3000K

Dimension (mm)




### ODL 474/6

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL474/6	6W	Black+Gold	65	25	1421

LED Colour : 3000K

Dimension (mm)





### ODL 474/8

Power By : EDISON

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL474/8	8W	Black+Gold	65	25	1650

LED Colour : 3000K

Dimension (mm)



### ODL 445/ LENS

Power By : TEEN


Model	Watt	Body	IP Rating	Beam Angle	DLP
ODL445/L	5W	Black/ Grey	65	25	990



### ODL 407

Power By : EDISON


Model	Watt	Body	IP Rating	Beam Angle	DLP
ODL407	2W	Black	65	75	904



### ODL 408

Power By : EDISON

Model	Watt	Body	IP Rating	Beam Angle	DLP
ODL408	2W	Black	65	50	904




### ODL 4094

Power By : EDISON 

LED Colour : 3000K

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL4094	4W	Black	65	50	1010



### ODL 409/8

Power By : EDISON 

LED Colour : 3000K

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL409/8	8W	Black	65	50	1282



### ODL 409/12

Power By : EDISON 

LED Colour : 3000K

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
ODL409/12	12W	Black	65	50	1584




### OCL

Power By : EDISON 

LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OCL201	5W	500	WB-BB	65	100	436

Dimension (mm)




### OFL

Power By : EDISON 

LED Colour : 2700 to 6500K

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL101	4W	GRAY	65	100	762

Dimension (mm)





### OFL

Power By : EDISON 

LED Colour : 2700 to 6500K

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL102	6W	GRAY	65	100	1008

Dimension (mm)




### OFL

Power By : EDISON 

LED Colour : 2700 to 6500K

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL727	5W	GRAY	65	100	612

Dimension (mm)





### OFL


Power By : EDISON



LED Colour : 3000K

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL730	5W	WB-GRAY	65	100	516

Dimension (mm)



### OFL


Power By : EDISON



LED Colour : 3000K

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL723	3W	WB-GRAY	65	90	648

Dimension (mm)



### OFL


Power By : EDISON



LED Colour : 3000K

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL103	5W	GRAY	65	100	510

Dimension (mm)



### OFL


Power By : EDISON



LED Colour : 3000K

Model	Watt	Body Colour	IP Rating	Beam Angle	DLP
OFL702	8W	GRAY	65	100	748

Dimension (mm)



### OFL


Power By : EDISON



LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OFL105-9	9W	900	GRAY	65	100	1056

Dimension (mm)



### ODL0402

Power By : EDISON



LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL0402	6W	780	BLACK	65	100	875

Dimension (mm)



### ODL0602


Power By : EDISON



LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL0602	8W	1040	BLACK	65	100	938

Dimension (mm)





### FLORA

Power By : EDISON



LED Colour : 3000K  
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
FLORA2	2W	260	BLACK	65	100	



### OPAL2

Power By : EDISON



LED Colour : 3000K  
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OPAL2	2W	260	BLACK	65	100	



### ARIES

Power By : EDISON



LED Colour : 3000K  
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ARIES3	3W	390	BLACK	65	100	



### LIME

Power By : EDISON



LED Colour : 3000K  
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
LIME3	3W	390	BLACK	65	100	




### FLOAT

Power By : EDISON



LED Colour : 3000K  
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
FLOAT3	3W	390	BLACK	65	100	



### ODL570

Power By : EDISON



LED Colour : 3000K  
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL570	8W	1040	BLACK	65	100	1125



### ODL560

Power By : EDISON



LED Colour : 3000K  
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
ODL560	6W	780	BLACK	65	100	938



### GEO

Power By : EDISON

POLY-CARBONATE

LED Colour : 3000K  
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
GEO4	4W	520	BLACK	65	100	



### OPAL4

Power By : EDISON

POLY-CARBONATE

LED Colour : 3000K  
Dimension (mm)

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
OPAL4	4W	520	BLACK	65	100	



10 PC BOX PACKING


### FSD

Power By : TEEN



LED Colour : 3000K

Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
FSD0212	12W	1440	GRAY	65	5/10	1265
FSD0218	18W	2160	GRAY	65	5/10	1552
FSD0212	24W	2880	GRAY	65	5/10	2100
FSD0212	12W	1440	R-G-B	65	5/10	2118



### FSD - SQ

Power By : TEEN



Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	Dimension	DLP
FSD024	24W	2880	GRAY	65	5/10	100x165x85	6418
FSD024 HOOD	24W	2880	GRAY	65	5/10	100x165x85	6545



### FSD - R

Power By : TEEN



Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	DLP
FSD R	18W	2160	GRAY	65	5/10	8294
FSD R HOOD	24W	2880	GRAY	65	5/10	10010



### ASK

Power By : TEEN

Model	Watt	Dimension (mm)	DLP
ASK 004	36	400X300	ON ORDER
ASK 004	50	400X300	ON ORDER

LED Colour : 3000K



### ASK

Power By : TEEN

Model	Watt	Dimension (mm)	DLP
ASK 005	36	475X200	ON ORDER
ASK 005	50	475X200	ON ORDER

LED Colour : 3000K



### ASK

Power By : TEEN

Model	Watt	Dimension (mm)	DLP
ASK 006	36X2	400X2X300	ON ORDER
ASK 006	50X2	400X2X300	ON ORDER

LED Colour : 3000K




### SK

Power By : TEEN



LED Colour : 3000K

Dimension (mm)



Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	Beam Angle	DLP
SK11-6	6W	600	BB-GRAY	3000K	65	36	587
SK11 R/G/B	6W	600	BB-GRAY	RGBRGB	65	36	636
SK 11	8W	960	BB-GRAY	3000K	65	36	710

R | G | B




### SK

Power By : TEEN



LED Colour : 3000K

Dimension (mm)



Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	Beam Angle	DLP
SK16	6W	600	BB	3000K	65	48	698
SK16-8	8W	960	BB	3000K	65	48	860




### SK

Power By : TEEN



LED Colour : 3000K

Dimension (mm)




Model	Watt	Lumens	Body Colour	LED Colour	IP Rating	Beam Angle	DLP
SK8	8W	960	BB	3000K	65	48	1197
SK8-12	12W	1440	BB	3000K	65	48	1320
SK8-20	20W	1800	BB	3000K	65	48	1616



### SK

Dimension (mm)



Model	Holder	Body Colour	IP Rating	DLP
SK08/BH	GU10	BB	65	756




### SK

Power By : TEEN



LED Colour : 3000K

Dimension (mm)



Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	MRP
SK712	12W	1440	BB	65	25-38	1320




### SK

Power By : TEEN



LED Colour : 3000K

Dimension (mm)



Model	Watt	Lumens	Body Colour	IP Rating	Beam Angle	MRP
Sk0207	7W	720	GRAY	65	54	1260
SK0212	12W	1440	GRAY	65	54	1848
Sk0215	15W	1800	GRAY	65	54	2220

SK0206

SK0212



**TERMS**

1. Request to all customers to give length sizes of pole and bollard in feet for accuracy.
2. 50% Advance payment at the time of P.O. & remaining before delivery.
3. Transportation and loading charge extra\*.



**BLL** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL 116	16W	300	ON ORDER
BLL 117	16W	600	ON ORDER

LED Colour : 3000K



**BLL** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL 109	12W	300	ON ORDER

LED Colour : 3000K



**BLL** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL 125	12W	300	ON ORDER

LED Colour : 3000K



**BLL** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL 129	12W	300	ON ORDER

LED Colour : 3000K



**BLL RD** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL RD 137	14W	300	ON ORDER
BLL RD 138	14W	600	ON ORDER

LED Colour : 3000K



**BLL SQ** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL SQ 139	14W	300	ON ORDER
BLL SQ 140	14W	600	ON ORDER

LED Colour : 3000K



**BLL** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL 127	12W	300	ON ORDER
BLL 128	12W	600	ON ORDER

LED Colour : 3000K



**BLL** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL 131	12W	300	ON ORDER
BLL 132	12W	600	ON ORDER

LED Colour : 3000K



**BLL** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL 133	12W	300	ON ORDER

LED Colour : 3000K



**BLL** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL 135	24W	300	ON ORDER

LED Colour : 3000K



**BLL** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL 133	12W	300	2400
BLL 133	12W	600	3000
BLL 133	12W	900	ON ORDER

LED Colour : 3000K



**BLL** Power By : TEEN

Model	Watt	Dimension (mm)	DLP
BLL 134	12W	300	2400
BLL 134	12W	600	3000
BLL 134	12W	900	ON ORDER

LED Colour : 3000K

**ON ORDER**

**Note: The prices of the all the bollards and poles are variable and may increase from time to time. Please contact our sales person before placing your order.**

# NEON FLEX

— **SHAPE YOUR SPACE** —

— WITH LIGHT —

Modern LED Strip Lighting for  
Stunning Interiors



## SLEEK & MODERN

Clean lines, contemporary elegance



## CUSTOM DESIGNS

Curves, shapes & contours tailored to your space



## ENERGY EFFICIENT

Low power, high impact illumination
































## DURABLE & SAFE

Long-lasting LED technology built for all environments


# TEKNOLITE


## SILICON FLEX PROFILE SERIES

 <p>PRODUCT CODE <b>1010 FL</b></p>		 <b>FLEX SIZE</b> 10 x 10mm  <b>STRIP SIZE:</b> PCB 5mm <p>• AVAILABLE WITH STRIP</p>	 <p><b>1010 TOP</b> 5mm PCB</p>
 <p>PRODUCT CODE <b>1212 FL</b></p>		 <b>FLEX SIZE</b> 12 x 12mm  <b>STRIP SIZE:</b> PCB 8mm <p>• AVAILABLE WITH STRIP</p>	 <p><b>1212 TOP</b> 8mm PCB</p>
 <p>PRODUCT CODE <b>1616 FL</b></p>		 <b>FLEX SIZE</b> 16 x 16mm  <b>STRIP SIZE:</b> PCB 8-12mm <p>• AVAILABLE WITH STRIP</p>	 <p><b>1616 TOP</b> 8-12mm PCB</p>
 <p>PRODUCT CODE <b>2014 FL</b></p>		 <b>FLEX SIZE</b> 20 x 14mm  <b>STRIP SIZE:</b> PCB 8-12mm <p>• AVAILABLE WITH STRIP</p>	 <p><b>2014 TOP</b> 8-12mm PCB</p>
 <p>PRODUCT CODE <b>1322 V</b></p>	<p><b>TWO SIDE V GROOVE FLEX</b></p>	 <b>FLEX SIZE:</b> 13 x 22mm  <b>STRIP SIZE:</b> PCB 5mm <p>• AVAILABLE WITH STRIP</p>	 <p><b>1322 TOP VIEW</b> 5mm PCB</p>
 <p>PRODUCT CODE <b>0410 SL</b></p>		 <b>FLEX SIZE</b> 04 x 10mm  <b>STRIP SIZE:</b> PCB 5mm <p>• AVAILABLE WITH STRIP</p>	 <p><b>0410 SIDE VIEW</b> 5mm PCB</p>

 PREMIUM QUALITY SILICONE

 FLEXIBLE & DURABLE

 WATER & DUST RESISTANT

 EASY TO INSTALL & MAINTAIN


# TEKNOLITE


## SILICON FLEX PROFILE SERIES

PRODUCT CODE

**0612 SL**

SIDE LIGHT

 FLEX SIZE:  
06 x 12mm

 STRIP SIZE:  
PCB 8mm




PRODUCT CODE

**1010 3SL**

3 SIDE LIGHT

 FLEX SIZE:  
10 x 10mm


 STRIP SIZE:  
PCB 5mm

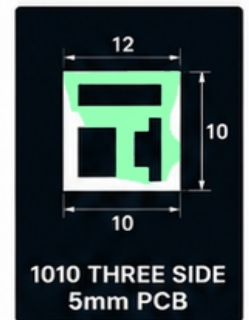



PRODUCT CODE

**1616 3SL**

3 SIDE LIGHT

 FLEX SIZE:  
16 x 16mm

 STRIP SIZE:  
PCB 8-10 mm

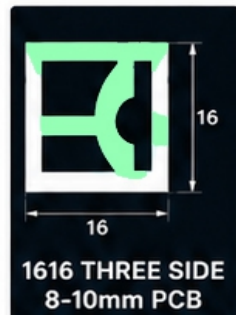


PRODUCT CODE

**1513 3SL**

3 SIDE 270°

 FLEX SIZE:  
15 x 13mm

 STRIP SIZE:  
PCB 8-10mm



PRODUCT CODE

**D22 360°**

360° LIGHT

 FLEX SIZE:  
Diameter 22mm

 STRIP SIZE:  
PCB 5mm




PRODUCT CODE

**1010 BLFL**

FRONT LIGHT

 FLEX SIZE:  
10 x 10mm


 STRIP SIZE:  
PCB 5mm

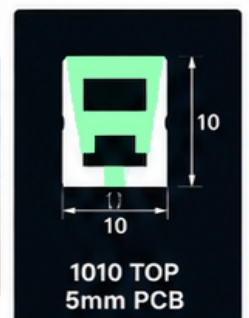


PRODUCT CODE

**1616 BLFL**

FRONT LIGHT

 FLEX SIZE:  
16 x 16mm

 STRIP SIZE:  
PCB 8-12mm

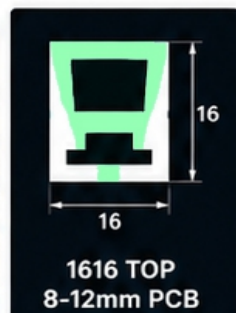


ACCESSORIES

CLIP & COVER

ENDCAP:  
With Hole / Plain

CLIP:  
Set / String

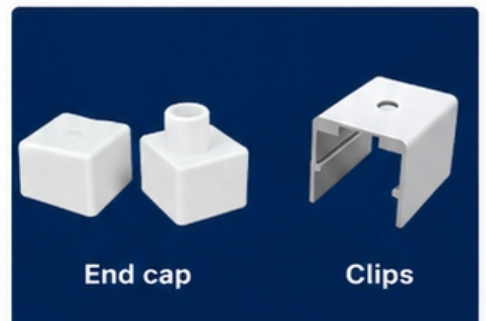



















































 PREMIUM QUALITY  
SILICONE

 FLEXIBLE &  
DURABLE

 WATER & DUST  
RESISTANT

 EASY TO INSTALL  
& MAINTAIN

PRODUCT CODE	PRODUCT	SIZE	MODEL NAME	QTY	DLP
TPF 007			7MM	<b>2 MTRS</b>	ON ORDER BLACK: ON ORDER
TPF 010			10MM CON	<b>2 MTRS</b>	ON ORDER
TPF 012			12MM CON	<b>2 MTRS</b>	ON ORDER
TPF 017			17MM CON	<b>2 MTRS</b>	ON ORDER BLACK: ON ORDER
TPF 007 SF			7MM SF	<b>2 MTRS</b>	ON ORDER BLACK: ON ORDER
TPF 010 SF			10MM SF	<b>2 MTRS</b>	ON ORDER
TPF 012 SF			12MM SF	<b>2 MTRS</b>	ON ORDER
TPF 017 SF			17MM SF	<b>2 MTRS</b>	ON ORDER BLACK: ON ORDER
TPF 025 CONL			25MM CON	<b>2 MTRS</b>	ON ORDER
TPF 035 CONL			35MM CON	<b>2 MTRS</b>	ON ORDER
TPF LDP 035 CONL			LOW DEEP PROFILE 35MM CON	<b>2 MTRS</b>	ON ORDER
TPF 050 CONL			50MM CON	<b>2 MTRS</b>	ON ORDER
TPF LDP 035 CONL			LOW DEEP PROFILE 35MM SF	<b>2 MTRS</b>	ON ORDER
TPF 035 SF			35MM SF	<b>2 MTRS</b>	ON ORDER
TPF 025 SF			25MM SF	<b>2 MTRS</b>	ON ORDER
TPF 050 SF			50MM SF	<b>2 MTRS</b>	ON ORDER
TPF LDP 050 SF			LOW DEEP PROFILE 50MM SF	<b>2 MTRS</b>	ON ORDER
TPF 075 SF			75MM SF	<b>2 MTRS</b>	ON ORDER

PRODUCT CODE	PRODUCT	SIZE	MODEL NAME	QTY	DLP
TPF CORNER			CORNER	<b>2 MTRS</b>	ON ORDER
TPF LDP 050 CONL			LOW DEEP PROFILE 50MM CON	<b>2 MTRS</b>	ON ORDER
TPF BENDABLE			Bendable	<b>2 MTRS</b>	ON ORDER
TPF 055 SF			55MM SF	<b>2 MTRS</b>	ON ORDER
TPF 075 CONL			75MM CON	<b>2 MTRS</b>	ON ORDER
TPF 017 DP			DEEP PROFILE 17 MM SF	<b>2 MTRS</b>	ON ORDER
TPF 017 DPC			DEEP PROFILE 17 MM CON	<b>2 MTRS</b>	ON ORDER



**SIZES: 300 | 600 | 900 | 1200 MM    BODY COLOR: WHITE & BLACK (AVAILABLE ON ORDER, 100% ADVANCE PAYMENT)**

**TERMS**

1. Hanging/Suspension kit will be charged extra for profiles.
2. Request to all customers to give length sizes of profiles in millimeters for accuracy.
3. Any customized design will be chargeable for fabrication work @ 10% of net value of profiles, power supply cost excluded.
4. Profile's order once placed will not be changed or cancelled.
5. 100% Advance payment at the time of P.O. & remaining before delivery.
6. Any profiles with PCB the size should be given in multiples of 50mm & for wire out let 10mm extra for each profiles.
7. Minimum Order Quantity is 100 Meters for Empty Housing Profiles.

A Class of it's own...




LED Lighting

OUR VALUED PATRONS



NOTE: COMPANY CAN CHANGE DIMENSIONS, SPECIFICATIONS, & PRODUCT'S DESIGN WITHOUT ANY PRIOR NOTICE.

A Class of it's own...

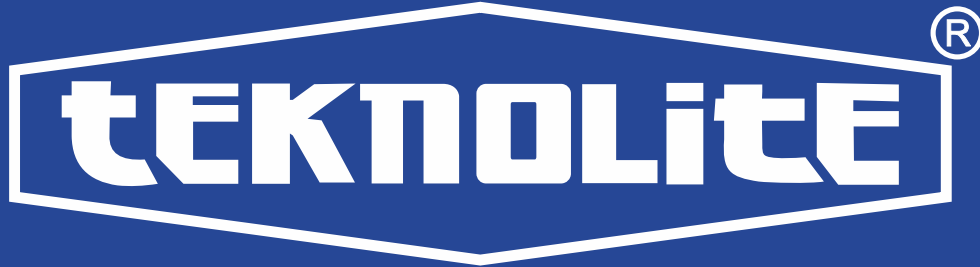

LED Lighting

# Teknovision Lighting Pvt. Ltd.

16, Waman Patil Industrial Estate, Chembur, Mumbai - 71 (INDIA)  
Phone : +91-22-42188888

[www.teknolite.in](http://www.teknolite.in)

